

LucasElektrik

marine range

Alternators & Starter Motors



Catalogue Nr. WFW24 Nov

www.lucaselektrik.com

TABLE OF CONTENTS

TITLE	PAGE
User Guide	A-1
Definitions & Wiring Diagrams.....	A-2
Alternator Fitting Instructions.....	A-3
Starter Motor Fitting Instructions.....	A-4
Product Index.....	A-5,A-6
Alternator Section 14V Units.....	1-19
Alternator Section 28V Units.....	20-28
Starter Motor Section 12V Units.....	29-41
Starter Motor Section 24V Units.....	42-46
Cross Reference List	47-86

NOTES

Area with horizontal dotted lines for writing notes.

USER'S GUIDE

ALTERNATORS

Part Number Volt / Output

LucasElektrik Part Number
Volt / Output

A

Pulley
O/hang
position

B

Thickness
of swivel
arm

C

Bracket
to bracket


Pulley
Type

Number
of groove
of the pulley

Pulley
Dia.

Pulley
outside
diameter

Plug
Type

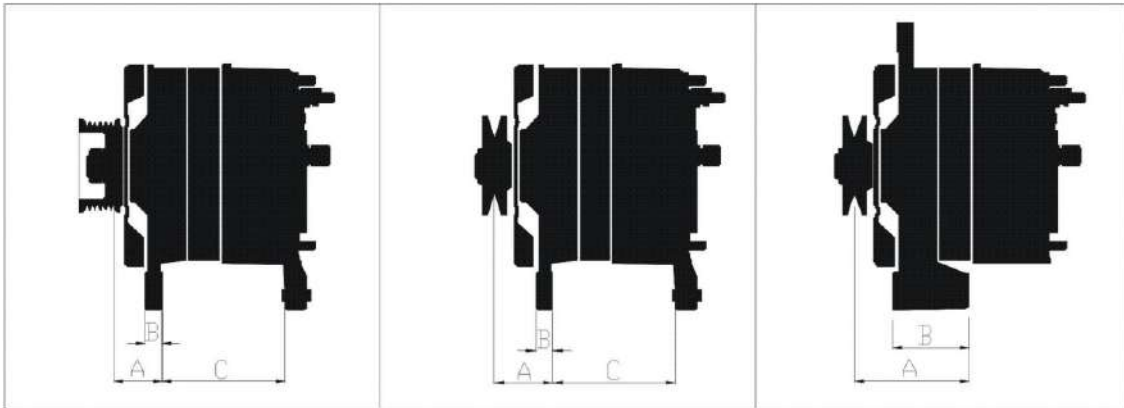

STARTER MOTORS

Part Number Volt / Output

LucasElektrik Part Number
Volt / Output

A

Spigot dia

B

Pinion
static
position

C


Lenght
of the
unit

Number
of teeth

Number
of teeth
of the
pinion

CW/
CCW

Sense of
rotation

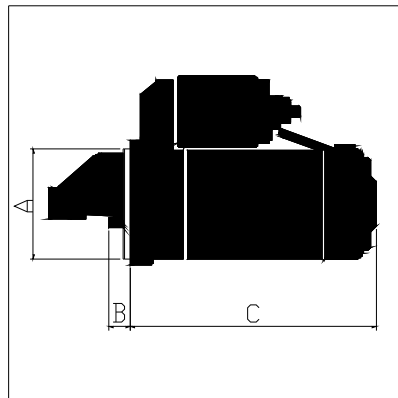

NOTES:

For all cross references please refer to our "Cross Reference" section at the end of this catalogue.
All part numbers are sorted by output; 24/28V units are in different sections.

www.lucaselektrik.com

BASIC DEFINITIONS & WIRING DIAGRAMS

DEFINITIONS


ANODISED BRACKETS Anodising is an electrochemical process that converts the metal surface into a durable, corrosion-resistant and anodic oxide finish. Therefore, rotating electrical products which are assembled with anodized aluminium brackets withstand the rigors of a marine environment, including high moisture, humidity and salt spray.

EARTH RETURN Earth return system use vehicle chassis and the starter motor frame as a return conductor thus allowing a single wire to be used for the components.


INSULATED RETURN Insulated return system use a separate & insulated cable system for both ,the feed and the return conductors; It is a safer system because with separate feed and return cables, it is practically impossible for the cable conductors to short even if chafed and touching any of the metal bodywork, as the body is not live since it is not a part of the electrical circuits. From the safety reasons, an insulated return system is essential for vehicles transporting highly flammable liquids and gases, where a spark could very easily set off an explosion or a fire. The same way it is also more reliable and safer for double-decker busses and marine vehicles.

ALTERNATORS WIRING DIAGRAM

EARTH RETURN

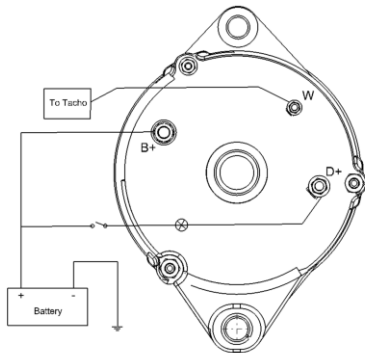


INSULATED RETURN

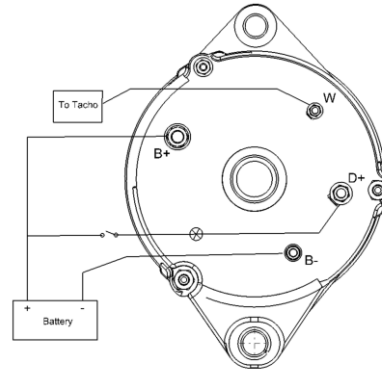


STARTER MOTORS WIRING DIAGRAM

EARTH RETURN

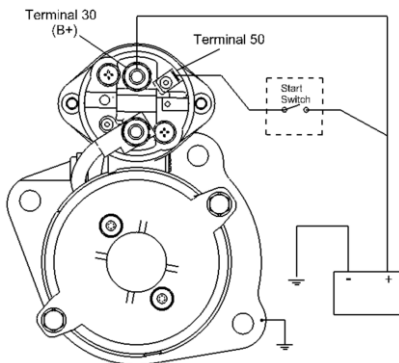

INSULATED RETURN

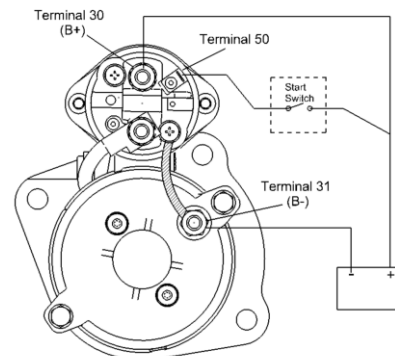

ALTERNATOR FITTING INSTRUCTIONS


PRIOR TO REMOVAL

Before the replacement of the alternator, please check the followings;

- * Battery is charged and in good conditions
- * Battery cables and the other electrical cables are correctly connected and not damaged.
- * Belt is properly tensioned not too high and too low.
- * Electrical / mechanical connections such as plugs, screws, nuts are properly tightened, fastened and not corroded.

INSTALLATION

- 1- Disconnect the battery cables, negative first.
- 2- Disconnect the electrical cables from the current alternator. Mark the connection cables of alternator output terminals to prevent mistake during the reconnection.
- 3- Disengage belt tensioner and loose the mounting bolts, then remove the alternator.
- 4- Check if any liquids such as oil, fuel visible on the current alternator. If this is the case, liquid leakages must be prevented on the engine before fitting the new alternator.
- 5- Check the rated voltage, output, terminals, fitting ears and their positions, rotation direction, pulley type etc. for the new alternator.
- 6- Ensure that there are no tear and damage on belt caused by oil, fuel.
- 7- Insert the alternator to the engine, tighten the mounting bolt with the correct torque according to the vehicle manufacturer specification.
- 8- Ensure that the belt tension is adjusted according to the vehicle manufacturer specification. If the belt tension is too high, bearings may be damaged. If the tension is too low, the belt may slip thus preventing the alternator working properly.
- 9- Reconnect the electrical connection cables to the alternator. Ensure that the cables are correctly located and they are not contact with the heated parts of the vehicle.
- 10- Reconnect first the positive battery cable and then negative cable. Battery terminals must be securely attached to the poles. Terminals and poles must be free of oxidation.
- 11- After starting the vehicle, make sure that electrical system is functionally working.

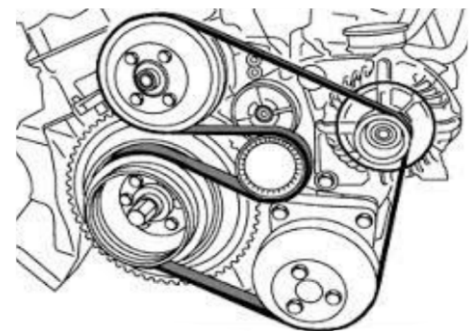

STARTER MOTOR FITTING INSTRUCTIONS


PRIOR TO REMOVAL

Before the replacement of the starter motor, please check the followings;

- * Battery is fully charged and in good conditions.
- * Battery cables are correctly connected and not damaged.
- * Electrical / mechanical connections such as plugs, screws, nuts are properly tightened, fastened and not corroded.
- * Ignition switch is working properly.

INSTALLATION

- 1- Disconnect the battery cables, negative first.
- 2- Disconnect the electrical cables from the current starter motor. Mark the connection cables of the starter motor terminals to prevent mistake during the reconnection and then remove the starter motor from the engine.
- 3- Check if any liquids such as oil, fuel visible on the current starter motor. If this is the case, liquid leakages must be prevented on the engine before fitting the new starter motor.
- 4- Check the rated voltage, output, terminals, flange, connection holes and their positions, number of teeth on drive, rotation direction of drive etc. for the new starter motor.
- 5- Ensure that the flywheel is not damaged or over-worn on tooth. Flywheel faults may cause drive and bush damaging.
- 6- If the flywheel is OK, and then insert the starter motor to the engine and tighten the mounting bolts with the correct torque according to the vehicle manufacturer specification.
- 7- Reconnect the electrical connection cables to the starter motor. Ensure that the cables are correctly located and not in contact with the heated parts of the vehicle.
- 8- Reconnect first the positive battery cable and then negative cable. Battery terminals must be securely attached to the poles. Terminals and poles must be free of oxidation or corrosion.
- 9- Make sure that starter motor is working properly by cranking.

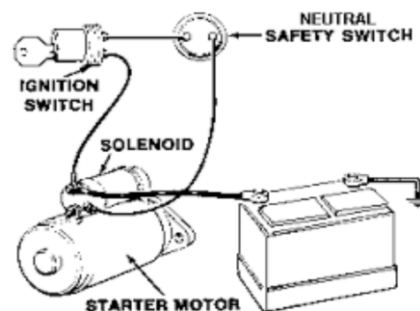

www.lucaselektrik.com

PRODUCT INDEX

LUCASELEKTRIK NO / PAGE

LEA0038	5
LEA0070	5
LEA0071	2
LEA0073	3
LEA0075	9
LEA0076	3
LEA0080	5
LEA0081	21
LEA0169	21
LEA0199	3
LEA0248	10
LEA0320	20
LEA0345	22
LEA0416	5
LEA0417	6
LEA0418	6
LEA0419	3
LEA0437	10
LEA0438	11
LEA0439	22
LEA0440	22
LEA0441	11
LEA0442	22
LEA0443	11
LEA0444	23
LEA0445	11
LEA0446	23
LEA0447	4
LEA0449	9
LEA0450	20
LEA0451	1
LEA0461	26
LEA0477	23
LEA0478	12
LEA0481	12
LEA0482	23
LEA0483	24
LEA0484	24
LEA0485	18
LEA0495	26
LEA0496	27
LEA0500	1
LEA0502	6

LUCASELEKTRIK NO / PAGE

LEA0510	20
LEA0512	24
LEA0526	20
LEA0532	24
LEA0534	12
LEA0556	6
LEA0561	1
LEA0584	7
LEA0586	7
LEA0587	9
LEA0590	21
LEA0593	7
LEA0594	7
LEA0597	25
LEA0599	8
LEA0605	8
LEA0607	8
LEA0610	4
LEA0613	1
LEA0615	4
LEA0619	14
LEA0626	16
LEA0628	28
LEA0630	27
LEA0638	16
LEA0670	18
LEA0692	25
LEA0772	25
LEA0826	18
LEA0864	2
LEA0867	13
LEA0868	13
LEA0869	14
LEA0873	17
LEA0880	19
LEA0882	25
LEA0886	17
LEA0887	15
LEA0888	17
LEA0891	17
LEA0893	15
LEA0896	15
LEA0897	15

LUCASELEKTRIK NO / PAGE

LEA0898	18
LEA0902	10
LEA0903	12
LEA0920	16
LEA0967	2
LEA1012	13
LEA1030	27
LEA1062	2
LEA1134	21
LEA1137	28
LEA1148	8
LEA1173	26
LEA1175	4
LEA1182	26
LEA1195	10
LEA1202	19
LEA1206	13
LEA1207	16
LEA1279	27
LEA1291	9
LEA1302	14
LEA1303	14
LES0032	32
LES0072	30
LES0090	33
LES0113	34
LES0137	35
LES0152	37
LES0179	30
LES0186	31
LES0195	34
LES0197	35
LES0199	38
LES0202	44
LES0219	32
LES0220	36
LES0221	33
LES0222	36
LES0223	33
LES0224	42
LES0225	33
LES0237	39
LES0244	36

www.lucaselektrik.com

PRODUCT INDEX

LUCASELEKTRIK NO / PAGE		LUCASELEKTRIK NO / PAGE		LUCASELEKTRIK NO / PAGE	
LES0245	36	LES0739	29		
LES0249	32	LES0740	29		
LES0254	37	LES0748	46		
LES0265	37				
LES0280	29				
LES0281	30				
LES0313	45				
LES0319	42				
LES0325	41				
LES0346	34				
LES0351	38				
LES0352	40				
LES0357	29				
LES0384	45				
LES0391	38				
LES0393	39				
LES0401	42				
LES0404	38				
LES0408	44				
LES0450	45				
LES0452	42				
LES0453	43				
LES0471	35				
LES0472	39				
LES0477	35				
LES0478	34				
LES0479	40				
LES0483	39				
LES0522	31				
LES0555	32				
LES0556	30				
LES0578	43				
LES0581	43				
LES0596	43				
LES0626	44				
LES0651	45				
LES0652	37				
LES0682	44				
LES0695	40				
LES0696	40				
LES0697	41				
LES0734	31				
LES0735	31				

www.lucaselektrik.com

ALTERNATOR SECTION 14V UNITS



www.lucaselektrik.com









NOTES

Area with horizontal dotted lines for writing notes.



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0561	14V / 40A	41,5	21,0		PV 1	69,0	
		YANMAR					
LEA0451	14V / 45A	50,0	18,0	66,0	PV 1	85,0	
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS 				IVECO MARINE IVECO AIFO	
LEA0500	14V / 45A	76,5	56,0		PV 1	72,0	
		<ul style="list-style-type: none"> ● "W" TERMINAL 				BPM DEUTZ DITER	
LEA0613	14V / 45A	45,5	15,0	66,0	PV 1	87,5	
		<ul style="list-style-type: none"> ● "W" TERMINAL 				VM MOTORI	



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0864	14V / 45A		56,0				
		● "W" TERMINAL		ARONA VM MOTORI			
LEA1062	14V / 45A	80,0	56,0		PV 1	71,0	
		● "W" TERMINAL		LOMBARDINI			
LEA0967	14V / 50A	73,2	54,0		PV 1	75,0	
		● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL		BUKH (AABENRAA)			
LEA0071	14V / 55A	75,5	56,0		PV 1	60,0	
		● "W" TERMINAL		VM MOTORI			











Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0073	14V / 55A	77,5	56,0		PV 1	69,0	
		<ul style="list-style-type: none"> ● "W" TERMINAL 		ALBIN MARINE			
LEA0076	14V / 55A		56,0				
		<ul style="list-style-type: none"> ● "W" TERMINAL 		BPM DEUTZ DITER FARYMANN DIESEL MWM-DIESEL VM MOTORI			
LEA0199	14V / 55A	71,5	51,0		PV 6	63,0	
		<ul style="list-style-type: none"> ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR 		MERCURY MARINE VOLVO PENTA			
LEA0419	14V / 55A	76,5	51,0		PV 1	70,0	
		<ul style="list-style-type: none"> ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR 		MERCURY MARINE VOLVO PENTA			











Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type	
LEA0447	14V / 55A	56,5	27,0		PV 1	73,0		
		<ul style="list-style-type: none"> ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR 						CRUSADER
LEA0610	14V / 55A	49,0	15,0	70,0	PV 1	80,0		
		<ul style="list-style-type: none"> ● "W" TERMINAL 						IVECO AIFO
LEA0615	14V / 55A	34,0	12,0	83,0	PV 4	49,0		
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL 						LISTER PETTER
LEA1175	14V / 55A	80,0	56,0		PV 1	68,0		
		<ul style="list-style-type: none"> ● "W" TERMINAL 						RUGGERINI













Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0038	14V / 65A		12,0	83,0			
		<p>● "W" TERMINAL</p>		<p>CUMMINS</p>			
LEA0070	14V / 65A		25,0	82,0			
		<p>● "W" TERMINAL</p>		<p>PERKINS SABRE</p>			
LEA0080	14V / 65A		51,0				
		<p>● "W" TERMINAL</p>		<p>JOHN DEERE MARINE</p>			
LEA0416	14V / 65A	72,0	51,0		PV 6	64,0	
		<p>● ANODISED BRACKETS</p> <p>● RADIO INTERFERENCE CAPACITOR</p>		<p>MERCURY MARINE</p>			











Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0417	14V / 65A	76,5	51,0		PV 1	70,0	
		<ul style="list-style-type: none"> ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR 		MERCURY MARINE			
LEA0418	14V / 65A	72,0	51,0		PV 1	70,0	
		<ul style="list-style-type: none"> ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR 		VOLVO PENTA			
LEA0502	14V / 65A		56,0				
		<ul style="list-style-type: none"> ● "W" TERMINAL 		VM MOTORI			
LEA0556	14V / 65A		12,0	83,0			
		<ul style="list-style-type: none"> ● "W" TERMINAL ● EUROPEAN & B+ STUD TERMINATIONS 		BETA MARINE			




Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0584	14V / 65A	37,0	12,0	83,0	PV 1	88,0	
		<ul style="list-style-type: none"> ● "W" TERMINAL ● EUROPEAN & B+ STUD TERMINATIONS 		BEDFORD MARINE			
LEA0586	14V / 65A	77,0	56,0		PV 1	72,0	
		<ul style="list-style-type: none"> ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL 		FARYMANN DIESEL			
LEA0593	14V / 65A		15,0	65,0			
		<ul style="list-style-type: none"> ● "W" TERMINAL 		IVECO AIFO			
LEA0594	14V / 65A		15,0	77,0			
		<ul style="list-style-type: none"> ● "W" TERMINAL 		BMW FNM - MARIN VM MOTORI			



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0075	14V / 70A	77,0	56,0		PV 1	69,0	
		● "W" TERMINAL		ALBIN MARINE			
LEA0605	14V / 65A	49,0	15,0	78,0	PV 1	71,0	
		● "W" TERMINAL		BMW			
LEA0607	14V / 65A	40,0	15,0	63,0	PV 5	62,5	
		● "W" TERMINAL		FNM - MARIN			
LEA1148	14V / 65A		15,0	65,0			
		● "W" TERMINAL		BPM			




Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA1291	14V / 70A	51,7	32,0		PV 1	65,0	




IVECO MARINE
LOMBARDINI


LEA0075	14V / 70A	77,0	56,0		PV 1	69,0	
----------------	------------------	------	------	--	------	------	--

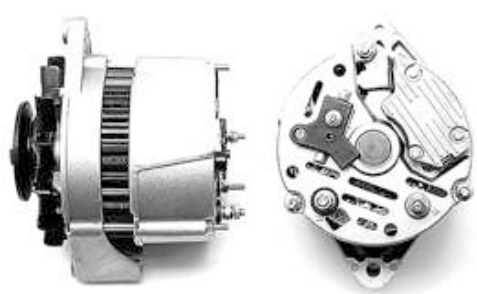

● "W" TERMINAL

ALBIN MARINE

LEA0449	14V / 70A		56,0				
----------------	------------------	--	------	--	--	--	---





● INSULATED RETURN

● ANODISED BRACKETS

● "W" TERMINAL

DEUTZ MARINE

LEA0587	14V / 70A	72,0	51,0		PV 1	73,0	
----------------	------------------	------	------	--	------	------	---














● RADIO INTERFERENCE CAPACITOR

● "W" TERMINAL

FARYMANN
MERCURY MARINE
NANNI INDUSTRIES
RENAULT MARINE
VOLVO PENTA











Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0902	14V / 70A	62,0	44,1		PV 1	57,0	
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL 		NANNI INDUSTRIES			
LEA1195	14V / 70A	29,0	11,3	83,0	PV 4	44,5	
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● "W" TERMINAL 		LISTER PETTER			
LEA0248	14V / 80A	92,0	58,0		PV 2	74,0	
		<ul style="list-style-type: none"> ● B+ STUD TERMINATIONS 		YANMAR MARINE			
LEA0437	14V / 80A	45,5	12,0	80,0 min	PV 1	83,0	
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL ● EUROPEAN & B+ STUD TERMINATIONS ● ADJUSTABLE PULLEY O/HANG POSITIONS 		BETA MARINE LISTER PETTER MERMAID MARINE			



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0438	14V / 80A	45,0	12,0	80,0 min	PV 1	83,0	
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL ● EUROPEAN & B+ STUD TERMINATIONS ● ADJUSTABLE PULLEY O/HANG POSITIONS 					LISTER PETTER
LEA0441	14V / 80A	43,0	11,0	80,0 min	PV 1	68,0	
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL ● EUROPEAN & B+ STUD TERMINATIONS ● ADJUSTABLE PULLEY O/HANG POSITIONS 					SOLE DIESEL
LEA0443	14V / 80A	62,0	27,0		PV 1	68,0	
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL ● EUROPEAN & B+ STUD TERMINATIONS ● ADJUSTABLE PULLEY O/HANG POSITIONS 					UNIVERSAL MULTIFIT
LEA0445	14V / 80A	88,0	56,0		PV 1	68,0	
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL ● EUROPEAN & B+ STUD TERMINATIONS ● ADJUSTABLE PULLEY O/HANG POSITIONS 					UNIVERSAL MULTIFIT



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type	
LEA0478	14V / 80A	73,5	51,0		PV 1	70,0		
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL 	FARYMANN					
								NANNI DIESEL
								NANNI INDUSTRIES
								RENAULT MARINE
								VOLVO PENTA
LEA0481	14V / 80A	71,0	51,0		PV 8	61,0		
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL 	JOHN DEERE MARINE					
LEA0534	14V / 80A	77,0	56,0		PV 1	73,0		
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL ● EUROPEAN & B+ STUD TERMINATIONS 	DEUTZ MARINE					
LEA0903	14V / 80A	78,0	51,0		PV 8	60,0		
		<ul style="list-style-type: none"> ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL 	JOHN DEERE MARINE					



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
-------------	---------------	---	---	---	-------------	-------------	-----------

LEA1206	14V / 80A	73,5	51,0		PV 1	70,0	
----------------	------------------	------	------	--	------	------	--

- ANODISED BRACKETS
- "W" TERMINAL

BMW
BUKH (AABENRAA)
NANNI INDUSTRIES
VOLVO-PENTA

LEA0867	14V / 90A		56,0				
----------------	------------------	--	------	--	--	--	--

- "W" TERMINAL
- SHAFT 27mm

DEUTZ AG (KHD)

LEA0868	14V / 90A		56,0				
----------------	------------------	--	------	--	--	--	--

- "W" TERMINAL
- SHAFT 35mm









KHD

LEA1012	14V / 95A	43,0	27,0	67,0	PV 6	56,0	
----------------	------------------	------	------	------	------	------	--

- "W" TERMINAL

VETUS DEN OUDEN



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA01302	14V / 95A		50,8				
		● "W" TERMINAL					JOHN DEERE MARINE
LEA1303	14V / 95A	27,0	50,8		PV 8	60,0	
		● "W" TERMINAL					JOHN DEERE MARINE
LEA0619	14V / 100A		51,0				
		● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL					BUKH (AABENRAA) JOHN DEERE MARINE
LEA0869	14V / 100A		50,8				
		● INSULATED RETURN ● BATTERY SENSED ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL					VOLVO PENTA



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
-------------	---------------	---	---	---	-------------	-------------	-----------

LEA0887	14V / 100A	78,0	51,0		PV 8	60,0	
----------------	-------------------	------	------	--	------	------	--



- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL

JOHN DEERE MARINE

LEA0893	14V / 100A		56,0				
----------------	-------------------	--	------	--	--	--	--



- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL

DEUTZ AG (KHD)

LEA0896	14V / 100A	38,3	12,0	82,0	PV 2	70,0	
----------------	-------------------	------	------	------	------	------	--



- INSULATED RETURN
- ANODISED BRACKETS
- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL

PERKINS SABRE









LEA0897	14V / 100A	38,3	12,0	82,0	PV 1	75,0	
----------------	-------------------	------	------	------	------	------	--



- INSULATED RETURN
- ANODISED BRACKETS
- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL

PERKINS SABRE



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0920	14V / 100A		56,0				
		● RADIO INTERFERENCE CAPACITOR	● "W" TERMINAL	JOHN DEERE MARINE			
LEA1207	14V / 100A		50,8		PV 1	70,0	
		● INSULATED RETURN	● RADIO INTERFERENCE CAPACITOR	● "W" TERMINAL	FARYMANN DIESEL MERCURY MARINE NANNI INDUSTRIES RENAULT MARINE VOLVO PENTA		
LEA0638	14V / 115A	31,0	13,0	83,0	PV 7	49,0	
		● "W" TERMINAL	IVECO NEF ENGINES				
LEA0626	14V / 120A		51,0				
		● RADIO INTERFERENCE CAPACITOR	● "W" TERMINAL	JOHN DEERE MARINE			



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
-------------	---------------	---	---	---	-------------	-------------	-----------

LEA0873	14V / 120A		56,0				
----------------	-------------------	--	------	--	--	--	--



- "W" TERMINAL

CUMMINS
JOHN DEERE MARINE
KOHLER

LEA0886	14V / 120A		56,0				
----------------	-------------------	--	------	--	--	--	--



- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL

JOHN DEERE MARINE

LEA0888	14V / 120A	27,5	51,0		PV 8	60,0	
----------------	-------------------	------	------	--	------	------	--



- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL

JOHN DEERE MARINE







LEA0891	14V / 120A		12,0	48,0			
----------------	-------------------	--	------	------	--	--	--



- INSULATED RETURN
- ANODISED BRACKETS
- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL



NANNI INDUSTRIES



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0898	14V / 120A		11,5	83,0			
		<ul style="list-style-type: none"> ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL 		BETA MARIN			
LEA0485	14V / 130A		14,0	102,0			
		<ul style="list-style-type: none"> ● INSULATED RETURN 		LEECE NEVILLE TYPE H.O. MARINE			
LEA0670	14V / 140A	45,0	109,0	82,0	PV 6	56,0	
		VOLVO PENTA					
LEA0826	14V / 150A	60,0	28,0	76,0	PV 6	54,0	
		YANMAR					

www.lucaselektrik.com



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0880	14V / 150A	85,0	56,0		PV 9	77,0	
		<p>● "W" TERMINAL</p>		<p>ARONA DEUTZ AG (KHD)</p>			
LEA1202	14V / 150A	85,0	56,0		PV 9	77,0	
		<p>● "W" TERMINAL</p>		<p>ARONA</p>			

ALTERNATOR SECTION 28V UNITS



www.lucaselektrik.com



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0450	28V / 27A	44,5	18,0	63,0	PV 1	89,0	
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS 		IVECO MARINE IVECO AIFO			
LEA0320	28V / 30A	45,0	18,0	66,0	PV 1	82,0	
		<ul style="list-style-type: none"> ● "W" TERMINAL 		IVECO AIFO			
LEA0510	28V / 35A	77,0	56,0		PV 1	72,0	
		<ul style="list-style-type: none"> ● "W" TERMINAL 		MWM - DIESEL			
LEA0526	28V / 35A		56,0				
		<ul style="list-style-type: none"> ● "W" TERMINAL 		DEUTZ MARINE			



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
-------------	---------------	---	---	---	-------------	-------------	-----------

LEA0590	28V / 35A	45,5	15,0	63,0	PV 1	80,0	
----------------	------------------	------	------	------	------	------	---



- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL

IVECO AIFO

LEA1134	28V / 35A	77,0	56,0				
----------------	------------------	------	------	--	--	--	---



- INSULATED RETURN
- ANODISED BRACKETS
- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL

VETUS DEN OUDEN

LEA0081	28V / 45A		51,0				
----------------	------------------	--	------	--	--	--	---



- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL

JOHN DEERE MARINE









LEA0169	28V / 55A		80,0				
----------------	------------------	--	------	--	--	--	---



- "W" TERMINAL
- RADIO INTERFERENCE CAPACITOR

**SCANIA
SLANZI**



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0345	28V / 55A		51,0				
		<ul style="list-style-type: none"> ● "W" TERMINAL ● RADIO INTERFERENCE CAPACITOR 	BUKH (AABENRAA) RENAULT MARINE				
LEA0439	28V / 55A	45,0	12,0	80,0 min	PV 1	83,0	
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL ● EUROPEAN & B+ STUD TERMINATIONS ● ADJUSTABLE PULLEY O/HANG POSITIONS 	MERMAID MARINE PERKINS SABRE				
LEA0440	28V / 55A	45,0	12,0	80,0 min	PV 1	83,0	
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL ● EUROPEAN & B+ STUD TERMINATIONS ● ADJUSTABLE PULLEY O/HANG POSITIONS 	PERKINS SABRE				
LEA0442	28V / 55A	42,5	11,0	80,0 min	PV 1	68,0	
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL ● EUROPEAN & B+ STUD TERMINATIONS ● ADJUSTABLE PULLEY O/HANG POSITIONS 	UNIVERSAL MULTIFIT				



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
-------------	---------------	---	---	---	-------------	-------------	-----------

LEA0444	28V / 55A	63,0	27,0		PV 1	68,0	
----------------	------------------	------	------	--	------	------	--

- INSULATED RETURN
- ANODISED BRACKETS
- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL
- EUROPEAN & B+ STUD TERMINATIONS
- ADJUSTABLE PULLEY O/HANG POSITIONS

UNIVERSAL MULTIFIT

LEA0446	28V / 55A	87,0	56,0		PV 1	68,0	
----------------	------------------	------	------	--	------	------	--

- INSULATED RETURN
- ANODISED BRACKETS
- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL
- EUROPEAN & B+ STUD TERMINATIONS
- ADJUSTABLE PULLEY O/HANG POSITIONS

UNIVERSAL MULTIFIT

LEA0477	28V / 55A	73,5	51,0		PV 1	70,0	
----------------	------------------	------	------	--	------	------	--

- INSULATED RETURN
- ANODISED BRACKETS
- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL









**DAF MARINE
NANNI DIESEL
VOLVO PENTA**

LEA0482	28V / 55A	72,0	51,0		PV 8	61,0	
----------------	------------------	------	------	--	------	------	--

- INSULATED RETURN
- ANODISED BRACKETS
- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL

JOHN DEERE MARINE



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type	
LEA0483	28V / 55A	77,0	56,0		PV 1	73,0		
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL 						DEUTZ MARINE
LEA0484	28V / 55A	34,0	12,0	80,0 min	PV 2	73,0		
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL ● EUROPEAN & B+ STUD TERMINATIONS 						PERKINS SABRE
LEA0512	28V / 55A		56,0 x 2					
		<ul style="list-style-type: none"> ● INSULATED RETURN ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL 						DEUTZ MARINE
LEA0532	28V / 55A	77,0	56,0					
		<ul style="list-style-type: none"> ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL 						VETUS DEN OUDEN



Part Number Volt / Output

A

B

C

Pulley Type

Pulley Dia.

Plug Type

LEA0597 28V / 55A

45,0

15,0

63,0

PV 1

80,0



- RADIO INTERFERENCE CAPACITOR **IVECO AIFO SEATEK**
- "W" TERMINAL

LEA0692 28V / 55A

51,0



- RADIO INTERFERENCE CAPACITOR **JOHN DEERE MARINE**
- "W" TERMINAL

LEA0772 28V / 55A

79,0

51,0

PV 8

60,0



- INSULATED RETURN
- ANODISED BRACKETS
- RADIO INTERFERENCE CAPACITOR **JOHN DEERE MARINE**
- "W" TERMINAL

LEA0882 28V / 55A











56,0









- "W" TERMINAL **DEUTZ AG (KHD)**

www.lucaselektrik.com



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA1173	28V / 55A		15,0	48,0			
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL 	NANNI INDUSTRIES				
LEA1182	28V / 55A		76,0				
		<ul style="list-style-type: none"> ● INSULATED RETURN ● RADIO INTERFERENCE CAPACITOR ● "W" TERMINAL 	CUMMINS PERKINS				
LEA0461	28V / 60A		14,0	101,0			
		<ul style="list-style-type: none"> ● INSULATED RETURN ● "W" TERMINAL 	VOLVO PENTA				
LEA0495	28V / 60A		51,0				
		<ul style="list-style-type: none"> ● INSULATED RETURN ● "W" TERMINAL 	VOLVO PENTA				



Part Number	Volt / Output	A	B	C	Pulley Type	Pulley Dia.	Plug Type
LEA0496	28V / 60A		14,0	102,0			
		<ul style="list-style-type: none"> ● INSULATED RETURN ● "W" TERMINAL 		VOLVO PENTA			
LEA1279	28V / 60A		56,0				
		SISU DIESEL					
LEA0630	28V / 80A	43,5	13,0	106,0	PV 8	63,0	
		VOLVO PENTA					
LEA1030	28V / 120A	85,0	56,0		PV 10	65,0	
		VOLVO PENTA					



Part Number Volt / Output

A

B

C

Pulley Type

Pulley Dia.

Plug Type

LEA1137 28V / 140A

15,0

180,0




- RADIO INTERFERENCE CAPACITOR
- "W" TERMINAL

VOLVO PENTA

LEA0628 28V / 175A

14,0

103,0



- INSULATED RETURN
- ANODISED BRACKETS

VOLVO PENTA

STARTER MOTOR SECTION 12V UNITS











www.lucaselektrik.com

NOTES

Dotted lines for writing notes.



Part Number	Volt / Output	A	B	C	CW/CCW	Number of teeth	
LES0740	12V / 0.8 kW		-1,0	180,0	CW	8	
		YANMAR MARINE					
LES0280	12V / 1.0 kW	77,0	18,0	134,0	CW	8	
		VOLVO PENTA					
LES0739	12V / 1.1 kW	80,0	25,0	162,0	CW	9	
		YANMAR MARINE					
LES0357	12V / 1.2 kW	76,0	27,5	165,0	CCW	9	
		ARONA RUGGERINI					



Part Number Volt / Output

A

B

C

CW/
CCW

Number
of teeth

LES0556 12V / 1.2 kW


76,0

15,0

162,0

CW

9



LOMBARDINI

LES0072 12V / 1.4 kW


95,0

20,5

138,0

CW

11



YANMAR MARINE

LES0179 12V / 1.4 kW


82,5

26,0

151,0

CW

9



**BETA MARINE
KUBOTA ENGINES
NANNI INDUSTRIES**

LES0281 12V / 1.4 kW


66,0

17,0

158,0

CW

9



**BETA MARINE
KUBOTA ENGINES
NANNI INDUSTRIES**



Part Number Volt / Output

A

B

C

**CW/
CCW**

**Number
of teeth**

LES0734 12V / 1.4 kW



95,0

22,0

177,0

CW

15



YANMAR MARINE

LES0735 12V / 1.5 kW


95,0

21,0

155,0

CW

13



YANMAR MARINE

LES0522 12V / 1.6 kW


74,0

20,0

162,0

CW

10



YANMAR MARINE

LES0186 12V / 1.7 kW


76,0

28,0

200,0

CW

9



BMW

www.lucaselektrik.com



Part Number Volt / Output

A

B

C

**CW/
CCW**

**Number
of teeth**


LES0249 12V / 1.7 kW

18,0

183,0

CW

11



**FORD MARINE
MERCURY MARINE**

LES0555 12V / 1.9 kW


82,5

20,0

230,0

CW

9



**DEUTZ AG (KHD)
FARYMANN DIESEL
MWM-DIESEL**

LES0032 12V / 2.1 kW


92,0

24,5

242,0

CCW

11



LISTER PETTER

LES0219 12V / 2.1 kW

88,8

29,5

230,0

CW

10



- INSULATED RETURN
- ANODISED BRACKETS

PERKINS SABRE



Part Number Volt / Output

A

B

C

CW/
CCW

Number
of teeth

LES0221 12V / 2.1 kW


88,8

29,5

228,0

CW

13



- INSULATED RETURN
- ANODISED BRACKETS

PERKINS SABRE

LES0223 12V / 2.1 kW


110,0

27,0

234,0

CW

9



- INSULATED RETURN
- ANODISED BRACKETS

IVECO MARINE

IVECO AIFO

LES0225 12V / 2.1 kW


88,8

29,5

230,0

CW

10



- INSULATED RETURN
- ANODISED BRACKETS

PERKINS SABRE

LES0090 12V / 2.2 kW


76,0

14,0

199,0

CW

10



FNM-MARIN

www.lucaselektrik.com



Part Number Volt / Output

A

B

C

**CW/
CCW**

**Number
of teeth**

LES0195 12V / 2.3 kW


95,0

20,0

209,0

CW

9



YANMAR MARINE

LES0346 12V / 2.3 kW


82,5

23,0

192,0

CW

9



DEUTZ AG (KHD)

LES0478 12V / 2.4 kW


82,5

21,0

247,0

CCW

9



**BPM
LOMBARDINI
RUGGERINI**

LES0113 12V / 2.5 kW

95,0

21,5

211,0









CW

15



YANMAR MARINE



Part Number	Volt / Output	A	B	C	CW/ CCW	Number of teeth	
LES0197	12V / 2.5 kW	82,0	10,0	278,0	CW	10	
		GM MARINE					
LES0137	12V / 2.7 kW	82,5	35,0	234,0	CW	13	
		JOHN DEERE MARINE					
LES0471	12V / 2.7 kW	82,5	20,0	229,0	CW	9	
		ARONA FARYMANN DIESEL LOMBARDINI MWM-DIESEL					
LES0477	12V / 2.7 kW	82,5	20,0	247,0	CW	11	
		BMW MERCUISER VM MOTORI					



Part Number Volt / Output

A

B

C

**CW/
CCW**

**Number
of teeth**

LES0220 12V / 2.8 kW

92,0

20,0

235,0

CW

10



- INSULATED RETURN
- ANODISED BRACKETS

FORD MARINE

LES0222 12V / 2.8 kW

88,8

47,5

240,0

CW

10



- INSULATED RETURN
- ANODISED BRACKETS

BEDFORD MARINE

LES0244 12V / 2.8 kW


92,0

20,5

236,0

CW

10



- INSULATED RETURN
- ANODISED BRACKETS

FORD MARINE

LES0245 12V / 2.8 kW


92,0

20,5

247,0

CW









13



- INSULATED RETURN
- ANODISED BRACKETS

FORD MARINE



Part Number	Volt / Output	A	B	C	CW/CCW	Number of teeth		
LES0254	12V / 2.8 kW	88,8	29,5	230,0	CW	10		
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS 		PERKINS SABRE				
LES0265	12V / 2.8 kW	88,8	47,0	239,0	CW	10		
		<ul style="list-style-type: none"> ● INSULATED RETURN ● ANODISED BRACKETS 		LEYLAND MARINE				
LES0652	12V / 2.8 kW	89,0	46,0	250,0	CW	10		
						PERKINS MARINE		
LES0152	12V / 3.0 kW	88,8	47,0	243,0	CW	10		
						CATERPILLAR MARINE		



Part Number Volt / Output

A

B

C

**CW/
CCW**

**Number
of teeth**

LES0199 12V / 3.0 kW


89,0

28,0

240,0

CW

9



VETUS DEN OUDEN

LES0351 12V / 3.0 kW


110,0

26,0

232,0

CW

9



IVECO AIFO

LES0391 12V / 3.0 kW


89,0

28,0

241,0

CW

10



IVECO NEF ENGINES

LES0404 12V / 3.0 kW


82,4

20,0

238,0

CW

11



BPM



Part Number Volt / Output

A

B

C

CW/
CCW

Number
of teeth

LES0483 12V / 3.0 kW


110,0

26,0

267,0

CW

9



IVECO AIFO

LES0237 12V / 3.1 kW


88,8

47,0

212,0

CW

11



● **INSULATED RETURN**

VOLVO PENTA

LES0472 12V / 3.1 kW


89,0

28,0

231,0

CW

9



DEUTZ AG (KHD)

LES0393 12V / 3.2 kW


89,0

29,0

225,0

CW

10



PERKINS

www.lucaselektrik.com



Part Number Volt / Output

A

B

C

CW/CCW

Number of teeth

LES0352 12V / 3.5 kW


110,0

26,0

232,0

CW

9



IVECO AIFO

LES0479 12V / 4.2 kW


89,0

48,0

226,0

CW

10



PERKINS


LES0695 12V / 4.2 kW

89,0

51,0

CW

10



● **INSULATED RETURN**

**CUMMINS
JOHN DEERE**


LES0696 12V / 4.2 kW

89,0

32,5

CW

10




● **INSULATED RETURN**

SABRE ENGINES



Part Number	Volt / Output	A	B	C	CW/ CCW	Number of teeth	
-------------	---------------	---	---	---	------------	--------------------	--


LES0697	12V / 4.2 kW	89,0	51,0		CW	11	
----------------	---------------------	------	------	--	----	----	--



● INSULATED RETURN

SISU DIESEL

LES0325	12V / 7.5 kW	92,0	47,0	394,0	CW	12	
----------------	---------------------	------	------	-------	----	----	--



● INSULATED RETURN

CATERPILLAR MARINE

STARTER MOTOR SECTION 24V UNITS



www.lucaselektrik.com



Part Number	Volt / Output	A	B	C	CW/CCW	Number of teeth	
-------------	---------------	---	---	---	--------	-----------------	--


LES0224	24V / 3.5 kW	109,8	27,0	234,0	CW	9	
----------------	---------------------	-------	------	-------	----	---	--



- INSULATED RETURN
- ANODISED BRACKETS


IVECO MARINE
IVECO AIFO

LES0319	24V / 4.0 kW	89,0	27,5	239,0	CW	9	
----------------	---------------------	------	------	-------	----	---	--




DEUTZ AG (KHD)

LES0401	24V / 4.0 kW	110,0	27,0	266,0	CW	9	
----------------	---------------------	-------	------	-------	----	---	--



IVECO AIFO

LES0452	24V / 4.0 kW	89,0	48,0	245,0	CW	9	
----------------	---------------------	------	------	-------	----	---	--



SCANIA




Part Number	Volt / Output	A	B	C	CW/CCW	Number of teeth		
LES0453	24V / 4.0 kW	89,0	48,0	246,0	CW	9		
							VOLVO PENTA	
LES0578	24V / 4.0 kW	89,0	51,0		CW	10		
		● INSULATED RETURN					CUMMINS JOHN DEERE	
LES0581	24V / 4.0 kW	89,0	32,5		CW	10		
		● INSULATED RETURN					CATERPILLAR SABRE ENGINES	
LES0596	24V / 4.0 kW	89,0	51,0		CW	11		
		● INSULATED RETURN					SISU DIESEL VALTRA VALMET	



Part Number	Volt / Output	A	B	C	CW/CCW	Number of teeth	
-------------	---------------	---	---	---	--------	-----------------	--


LES0626	24V / 4.0 kW	89,0	31,0		CW	9	
----------------	---------------------	------	------	--	----	---	--



● **INSULATED RETURN**


**DEUTZ AG (KHD)
VOLVO PENTA**

LES0682	24V / 4.0 kW	89,0	30,0	240,0	CW	10	
----------------	---------------------	------	------	-------	----	----	--




LISTER PETER

LES0202	24V / 4.5 kW	89,0	46,0	250,0	CW	10	
----------------	---------------------	------	------	-------	----	----	--











CUMMINS

LES0408	24V / 5.5 kW	89,0	48,0	268,0	CW	11	
----------------	---------------------	------	------	-------	----	----	--



**SCANIA
WEICHAI POWER**

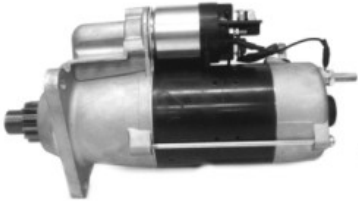

Part Number	Volt / Output	A	B	C	CW/ CCW	Number of teeth	
LES0384	24V / 6.0 kW	92,0	49,0	312,0	CW	12	
		● INSULATED RETURN		VOLVO PENTA			
LES0313	24V / 7.5 kW	92,0	46,0	395,0	CW	12	
		● INSULATED RETURN		JOHN DEERE MARINE			
LES0450	24V / 7.5 kW	92,0	45,0	391,0	CW	11	
		● INSULATED RETURN		CUMMINS			
LES0651	24V / 7.5 kW	92,0	47,0	408,0	CW	11	
		● INSULATED RETURN		IVECO AIFO			

www.lucaselektrik.com



Part Number Volt / Output

A

B

C

**CW/
CCW**

**Number
of teeth**

LES0748 24V / 7,5 kW


89,0

48,0

160,5

CW

11



JOHN DEERE MARINE

CROSS REFERENCE LIST

X → LucasElektrik

NOTICE ON REFERENCE NUMBERS

Some of the units which have been displayed on this catalogue are known in the market based on their “ automotive ” cross reference numbers.

Some others, which exist in the market as only automotive versions are also now uniquely available from Lucas Elektrik A.S. as “ marine ” versions.

Therefore, “ automotive ” cross reference part numbers have also been included in this section for ease of use and/or identification.

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

BETA MARIN

200-01384	LEA0437	10
200-02153	LEA1279	27
200-08183	LEA0898	18
200-69190	LEA0437	10
600-00540	LES0179	30
600-01155	LEA0556	6
660-00918	LES0281	30
660-05147	LES0281	30

BMW

12317789980	LEA0826	18
12317789983	LEA0826	18
12317797660	LEA0826	18
12317797661	LEA0826	18
12411271749	LES0186	31
12411272150	LES0186	31
12411333980	LES0477	35
12411352502	LES0186	31
12411352504	LES0186	31
12411713898	LES0186	31
12411717174	LES0186	31
12411720635	LES0186	31
12411720663	LES0186	31
12411720664	LES0186	31
12417787354	LES0522	31
12417787356	LES0522	31
7787354	LES0522	31

BOSCH

0001107024	LES0357	29
0001107033	LES0556	30
0001107051	LES0556	30
0001107062	LES0556	30
0001107085	LES0556	30
0001107099	LES0357	29
0001108210	LES0186	31
0001109009	LES0186	31
0001109369	LES0346	34
0001109450	LES0351	38
0001109460	LES0346	34
0001110028	LES0186	31

0001110041	LES0186	31
0001110042	LES0186	31
0001115034	LES0186	31
0001115035	LES0186	31
0001218105	LES0090	33
0001218128	LES0090	33
0001223016	LES0346	34
0001223021	LES0346	34
0001230006	LES0199	38
0001230020	LES0391	38
0001230021	LES0391	38
0001230026	LES0391	38
0001231005	LES0319	42
0001231014	LES0453	43
0001231028	LES0319	42
0001241008	LES0408	44
0001261016	LES0408	44
0001262001	LES0199	38
0001262019	LES0391	38
0001262020	LES0391	38
0001262021	LES0391	38
0001262022	LES0391	38
0001263008	LES0319	42
0001263028	LES0319	42
0001263052	LES0319	42
0001311042	LES0186	31
0001314001	LES0186	31
0001314025	LES0186	31
0001314043	LES0186	31
0001314045	LES0186	31
0001326331	LES0479	40
0001330007	LES0384	45
0001330017	LES0384	45
0001330018	LES0384	45
0001354007	LES0478	34
0001354012	LES0555	32
0001354027	LES0555	32
0001354082	LES0555	32
0001354089	LES0478	34
0001354091	LES0555	32

0001358003	LES0404	38
0001358038	LES0471	35
0001359091	LES0351	38
0001359102	LES0351	38
0001359122	LES0483	39
0001360010	LES0452	42
0001360019	LES0626	44
0001360031	LES0626	44
0001360038	LES0452	42
0001360048	LES0596	43
0001360061	LES0453	43
0001360063	LES0401	42
0001362017	LES0471	35
0001362018	LES0471	35
0001362022	LES0404	38
0001362032	LES0351	38
0001362035	LES0404	38
0001362040	LES0471	35
0001362058	LES0478	34
0001362076	LES0471	35
0001362302	LES0479	40
0001362303	LES0477	35
0001362304	LES0477	35
0001362324	LES0652	37
0001366004	LES0471	35
0001366004	LES0555	32
0001366015	LES0471	35
0001366022	LES0555	32
0001367008	LES0477	35
0001367014	LES0351	38
0001367029	LES0483	39
0001368001	LES0319	42
0001368008	LES0626	44
0001368010	LES0452	42
0001368015	LES0596	43
0001368017	LES0453	43
0001368020	LES0401	42
0001368026	LES0682	44
0001368040	LES0682	44
0001368051	LES0682	44

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

0120339531	LEA0500	1
0120339536	LEA0864	2
0120400517	LEA0169	21
0120400541	LEA0510	20
0120400542	LEA0510	20
0120400558	LEA0510	20
0120400563	LEA0510	20
0120400566	LEA0510	20
0120400567	LEA0510	20
0120400569	LEA0510	20
0120400600	LEA0586	7
0120400641	LEA0510	20
0120400666	LEA0510	20
0120400674	LEA0510	20
0120400685	LEA0510	20
0120400685	LEA1134	21
0120400720	LEA0169	21
0120400778	LEA0478	12
0120400799	LEA1134	21
0120339521	LEA0864	2
0120339531	LEA0076	3
0120339531	LEA0500	1
0120339536	LEA0864	2
0120400517	LEA0169	20
0120400541	LEA0510	19
0120400542	LEA0510	19
0120400558	LEA0510	19
0120400563	LEA0510	19
0120400566	LEA0510	19
0120400567	LEA0510	19
0120400569	LEA0510	19
0120400600	LEA0586	7
0120400641	LEA0510	19
0120400666	LEA0510	19
0120400674	LEA0510	19
0120400685	LEA0510	19
0120400685	LEA1134	20
0120400720	LEA0169	20
0120400778	LEA0478	12
0120400799	LEA1134	20

0120469014	LEA0345	22
0120469018	LEA0461	26
0120469033	LEA0461	26
0120469043	LEA0512	24
0120469044	LEA0461	26
0120469523	LEA0345	22
0120469569	LEA0169	21
0120469643	LEA0169	21
0120469693	LEA0169	21
0120469763	LEA0169	21
0120469798	LEA0345	22
0120469807	LEA0169	21
0120469900	LEA0169	21
0120469959	LEA0169	21
0120484002	LEA0920	16
0120484003	LEA0920	16
0120484011	LEA0619	14
0120484012	LEA0886	17
0120484016	LEA0920	16
0120484017	LEA0886	17
0120484018	LEA0619	14
0120484019	LEA0886	17
0120484020	LEA0920	16
0120484026	LEA0619	14
0120484027	LEA0626	16
0120484051	LEA0888	17
0120484134	LEA0586	7
0120484233	LEA0586	7
0120484290	LEA0481	12
0120488114	LEA0071	2
0120488114	LEA0076	3
0120488144	LEA0502	6
0120488153	LEA0526	20
0120488158	LEA0073	3
0120488164	LEA0075	9
0120488165	LEA0075	9
0120488185	LEA0076	3
0120488191	LEA0075	9
0120488195	LEA0593	7
0120488195	LEA0594	7

0120488195	LEA0599	8
0120488205	LEA0080	5
0120488206	LEA0692	25
0120488209	LEA0502	6
0120488234	LEA0526	20
0120488251	LEA0593	7
0120488251	LEA0594	7
0120488252	LEA0320	20
0120488253	LEA0320	20
0120488266	LEA0320	20
0120488283	LEA0526	20
0120488292	LEA1134	21
0120488293	LEA0080	5
0120488294	LEA0081	21
0120488294	LEA0692	25
0120488475	LEA0080	5
0120489018	LEA0593	7
0120489018	LEA0594	7
0120489021	LEA0593	7
0120489021	LEA0594	7
0120489071	LEA0081	21
0120489106	LEA0593	7
0120489106	LEA0594	7
0120489106	LEA1148	8
0120489107	LEA0593	7
0120489107	LEA0594	7
0120489116	LEA0073	3
0120489117	LEA0073	3
0120489118	LEA0599	8
0120489119	LEA0073	3
0120489132	LEA0613	1
0120489133	LEA0613	1
0120489134	LEA0593	7
0120489135	LEA0593	7
0120489136	LEA0593	7
0120489136	LEA0594	7
0120489137	LEA0593	7
0120489137	LEA0594	7
0120489146	LEA0593	7
0120489146	LEA0594	7

REFERENCE NO/LUCASELEKTRIK NO/PAGE

0120489146	LEA0605	8
0120489147	LEA0593	7
0120489147	LEA0594	7
0120489147	LEA0599	8
0120489152	LEA0593	7
0120489152	LEA0594	7
0120489171	LEA0593	7
0120489171	LEA0594	7
0120489192	LEA0169	21
0120489212	LEA0593	7
0120489212	LEA0594	7
0120489219	LEA0593	7
0120489219	LEA0594	7
0120489309	LEA0071	2
0120489384	LEA0556	6
0120489410	LEA0320	20
0120489410	LEA0590	21
0120489412	LEA0320	20
0120489412	LEA0590	21
0120489481	LEA0692	25
0120489585	LEA0073	3
0120489612	LEA0320	20
0120489612	LEA0590	21
0120489625	LEA0073	3
0120489626	LEA0073	3
0120489636	LEA0073	3
0120489637	LEA0593	7
0120489637	LEA0594	7
0120489638	LEA0320	20
0120489639	LEA0320	20
0120489640	LEA0081	21
0120489661	LEA0320	20
0120489662	LEA0320	20
0120489672	LEA0613	1
0120489673	LEA0613	1
0120489682	LEA0320	20
0120489682	LEA0590	21
0120489702	LEA0169	21
0120489731	LEA0526	20
0120489740	LEA0613	1

REFERENCE NO/LUCASELEKTRIK NO/PAGE

0120489741	LEA0613	1
0120489756	LEA0502	6
0120489763	LEA0593	7
0120489763	LEA0594	7
0120489766	LEA0073	3
0120489767	LEA0073	3
0120489769	LEA0073	3
0120489770	LEA0593	7
0120489770	LEA0594	7
0120489770	LEA0599	8
0120489792	LEA0320	20
0120489793	LEA0320	20
0120489793	LEA0590	21
0120489794	LEA0320	20
0120489794	LEA0590	21
0120489795	LEA0320	20
0120489796	LEA0320	20
0120489824	LEA0593	7
0120489824	LEA0594	7
0120489920	LEA0613	1
0120489921	LEA0613	1
0120689511	LEA1137	28
0120689543	LEA1137	28
0120689548	LEA1137	28
0120689552	LEA1137	28
0120689561	LEA1137	28
0120689566	LEA1137	28
0120689573	LEA1137	28
0123315501	LEA0867	13
0123510060	LEA1202	19
0123510074	LEA1202	19
0123512500	LEA0873	17
0123512502	LEA1202	19
0123515500	LEA0880	19
0123520015	LEA1202	19
0123520030	LEA1202	19
0124525001	LEA0670	18
0124525014	LEA0670	18
0124525029	LEA0670	18
0124525529	LEA0670	18

REFERENCE NO/LUCASELEKTRIK NO/PAGE

0124555009	LEA0630	27
0124555027	LEA0630	27
0124555028	LEA0630	27
0124555038	LEA0630	27
0124555077	LEA0630	27
0124615041	LEA1202	19
0124615057	LEA0880	19
0986010870	LES0186	31
0986010980	LES0453	43
0986011280	LES0452	42
0986011330	LES0401	42
0986011331	LES0401	42
0986013770	LES0682	44
0986014890	LES0186	31
0986015090	LES0090	33
0986015620	LES0186	31
0986016550	LES0472	39
0986017310	LES0555	32
0986017970	LES0477	35
0986018110	LES0357	29
0986018220	LES0090	33
0986019020	LES0199	38
0986019040	LES0556	30
0986019820	LES0346	34
0986020190	LES0453	43
0986021000	LES0319	42
0986022550	LES0351	38
0986022631	LES0090	33
0986022930	LES0522	31
0986023460	LES0281	30
0986030120	LEA0599	8
0986030130	LEA0076	3
0986030130	LEA0500	1
0986030131	LEA0500	1
0986030140	LEA0864	2
0986030870	LEA0073	3
0986030871	LEA0073	3
0986030880	LEA0073	3
0986030891	LEA0073	3
0986030940	LEA0599	8

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

0986030970	LEA0593	7
0986030970	LEA0594	7
0986030970	LEA0605	8
0986031250	LEA0169	21
0986031260	LEA0510	20
0986031340	LEA0320	20
0986031340	LEA0590	21
0986031410	LEA0593	7
0986031410	LEA0613	1
0986032171	LEA0599	8
0986032191	LEA0320	20
0986032191	LEA0590	21
0986032720	LEA0169	21
0986032721	LEA0169	21
0986033250	LEA0599	8
0986033785	LEA1182	26
0986033840	LEA0345	22
0986033841	LEA0345	22
0986034370	LEA0345	22
0986034490	LEA0593	7
0986034610	LEA1137	28
0986034650	LEA0075	9
0986034651	LEA0075	9
0986035630	LEA0593	7
0986035630	LEA0594	7
0986035760	LEA0610	4
0986035910	LEA0526	20
0986036750	LEA0599	8
0986036800	LEA0920	16
0986037120	LEA0607	8
0986037150	LEA0593	7
0986037150	LEA0594	7
0986037160	LEA0599	8
0986037890	LEA0076	3
0986037890	LEA0502	6
0986038781	LEA1012	13
0986038791	LEA1012	13
0986039810	LEA0886	17
0986040280	LEA0619	14
0986040290	LEA0080	5

REFERENCE NO/LUCASELEKTRIK NO/PAGE

0986041940	LEA0320	20
0986043130	LEA1202	19
0986044060	LEA1137	28
0986044571	LEA0038	5
0986044761	LEA0638	16
0986044900	LEA0670	18
0986045990	LEA1137	28
0986046000	LEA0867	13
0986046030	LEA0873	17
0986046290	LEA0630	27
0986047210	LEA0880	19
0986048920	LEA0826	18
0986048921	LEA0826	18
0986080820	LEA0638	16
0986604892	LEA0826	18
0986XL9116	LEA1012	13
120400517	LEA0169	21
120400720	LEA0169	21
120489192	LEA0169	21
120489702	LEA0169	21
1986A00895	LEA0670	18
1986A00917	LEA0630	27
1986A00946	LEA0880	19
1986A01173	LEA0880	19
1986A01363	LEA0169	21
1986S00762	LES0186	31
1986S01037	LES0090	33
1986S10050	LES0319	42
1S4U11000AB	LES0090	33
2010001008	LES0090	33
9120060040	LEA0903	12
9120060041	LEA0903	12
9120060042	LEA0626	16
9124476314	LEA0556	6
9124476315	LEA0038	5
9124476326	LEA0038	5
986031250	LEA0169	21
A005A0024	LEA0619	14
A005A0025	LEA0886	17
AL9935X	LEA0920	16

REFERENCE NO/LUCASELEKTRIK NO/PAGE

AL9942X	LEA0920	16
AL9959X	LEA0903	12
F002G70047	LES0186	31
F005A00022	LEA0081	21
F005A00022	LEA0692	25
F005A00024	LEA0619	14
F005A005025	LEA0626	16
F032115572	LES0032	32
F042003074	LES0313	45
F042004030	LES0195	34
F042301018	LEA0345	22
F042301139	LEA0886	17
F042301172	LEA1137	28
BUKH (AABENRAA)		
008E8253	LEA0967	2
008E9529	LEA0967	2
612H0300	LEA0967	2
612H0500	LEA0967	2
612H0520	LEA0967	2
CARGO		
110048	LEA0478	12
110076	LEA0169	21
110127	LEA0478	12
110176	LEA0628	28
110244	LES0179	30
110347	LES0651	45
110436	LES0325	41
110447	LES0281	30
110485	LES0735	31
110518	LES0401	42
110522	LES0483	39
110527	LES0452	42
110529	LES0351	38
110529	LES0352	40
110530	LES0404	38
110590	LES0652	37
110640	LES0351	38
110641	LEA0500	1
110720	LES0179	30
110813	LES0351	38

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

110867	LES0090	33
110882	LEA0593	7
110882	LEA0594	7
110890	LEA0593	7
110890	LEA0605	8
110942	LES0137	35
110959	LEA0419	3
110999	LES0313	45
111000	LES0450	45
111015	LES0556	30
111021	LES0281	30
111047	LES0237	39
111052	LES0186	31
111138	LEA0613	1
111166	LEA0075	9
111256	LES0197	35
111283	LEA0638	16
111284	LES0404	38
111295	LEA1182	26
111299	LES0179	30
111355	LEA0556	6
111397	LEA0478	12
111509	LEA0437	10
111510	LEA0439	22
111528	LEA0345	22
111622	LES0281	30
111631	LEA0461	26
111638	LES0453	43
111658	LEA0495	26
111686	LEA0593	7
111699	LES0249	32
111710	LEA0416	5
111738	LEA0038	5
111744	LEA1182	26
111745	LEA1182	26
111760	LES0202	44
111786	LES0249	32
111834	LEA0169	21
111843	LEA0619	14
111888	LEA0080	5

111889	LEA1137	28
111985	LES0249	32
112021	LEA0638	16
112039	LES0471	35
112062	LEA0873	17
112071	LES0199	38
112097	LEA0320	20
112098	LEA0586	7
112112	LEA0437	10
112170	LEA0081	21
112170	LEA0692	25
112171	LES0357	29
112172	LES0186	31
112196	LEA1202	19
112238	LEA0038	5
112290	LES0090	33
112299	LEA1012	13
112341	LES0197	35
112343	LEA1137	28
112345	LEA0345	22
112374	LES0113	34
112494	LES0319	42
112529	LEA0867	13
112547	LES0281	30
112555	LES0472	39
112670	LES0682	44
112675	LES0072	30
112676	LES0195	34
112768	LEA0599	8
113152	LEA0441	11
113181	LES0346	34
113237	LES0152	37
113272	LEA0670	18
113376	LEA0073	3
113408	LES0072	30
113438	LEA1012	13
113470	LEA0526	20
113477	LEA0495	26
113531	LEA0886	17
113533	LEA1291	9

113574	LEA0584	7
113631	LEA1207	16
113632	LEA0920	16
113633	LEA0447	4
113679	LES0249	32
113713	LEA0438	11
113714	LEA0440	22
113715	LEA0248	10
113738	LEA0882	25
113768	LEA0868	13
113881	LEA0826	18
113966	LES0179	30
114119	LES0090	33
114127	LES0522	31
114222	LES0748	46
114266	LES0596	43
114327	LES0408	44
114388	LES0393	39
114473	LES0384	45
114669	LEA1148	8
114735	LEA1202	19
114739	LES0740	29
114783	LEA0893	15
114868	LEA0481	12
114891	LES0739	29
115344	LES0471	35
115423	LES0478	34
115472	LES0477	35
115572	LES0032	32
115605	LEA0888	17
115721	LES0479	40
115816	LES0186	31
115972	LES0739	29
115985	LES0249	32
115987	LEA1202	19
116018	LEA0483	24
116023	LEA0772	25
116112	LES0113	34
116129	LEA0867	13
116131	LEA1062	2

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

116453	LEA0873	16
116506	LEA0891	17
116524	LEA0532	23
116453	LEA0873	17
116506	LEA0891	17
116524	LEA0532	24
116550	LEA0868	13
116556	LES0357	29
116588	LES0651	45
116651	LEA1030	27
F032111843	LEA0619	14
F032112529	LEA0867	13
F032113533	LEA1291	9
F032115816	LES0186	31
F032116129	LEA0867	13

CATERPILLAR

0R2186	LES0313	45
0R2187	LES0450	45
0R2189	LES0325	41
0R2190	LES0450	45
0R4259	LES0450	45
0R5207	LES0313	45
0R5208	LES0325	41
0R5218	LES0325	41
104-7041	LES0450	45
104-7042	LES0450	45
106-8551	LES0450	45
106-8554	LES0450	45
1092361	LES0682	44
10R0400	LES0450	45
18162	LEA1182	26
2071555	LES0313	45
2071556	LES0450	45
2071560	LES0313	45
2098423	LES0651	45
2371962	LES0651	45
2N3538	LES0325	41
3001117	LEA0628	28
3383454	LES0651	45
35361	LEA0437	10

REFERENCE NO/LUCASELEKTRIK NO/PAGE

3E7285	LEA0080	5
3T2780	LES0651	45
3T2785	LES0651	45
3T2787	LES0651	45
3T3778	LES0651	45
3T4586	LES0313	45
3T8947	LES0651	45
3T8954	LES0651	45
3T8967	LES0651	45
40030	LEA1182	26
4N0957	LES0450	45
4N0959	LES0651	45
4N1062	LES0450	45
4N3181	LES0313	45
4N3343	LES0651	45
4N8118	LES0450	45
5L4405	LES0651	45
5L5353	LES0651	45
5L648	LES0651	45
5LG48	LES0651	45
6N1889	LES0450	45
6N9667	LES0651	45
6N9677	LES0651	45
6T0647	LES0651	45
6V0890	LES0651	45
6V5539	LES0450	45
7N6503	LES0325	41
7T1081	LES0325	41
7T2265	LES0325	41
7T9254	LES0325	41
8C3596	LES0325	41
8C3645	LES0450	45
8C3648	LES0325	41
8C3651	LES0313	45
8H1913	LES0450	45
8L5881	LES0325	41
8L8205	LES0651	45
9L3597	LES0325	41
9L6464	LES0651	45
9L6484	LES0651	45

REFERENCE NO/LUCASELEKTRIK NO/PAGE

9W0058	LES0325	41
9W2946	LES0152	37
9W3043	LEA0169	21
9X0341	LEA0619	14
9X0341	LEA1302	14
PX0341	LEA0619	14

CRUSADER

39049	LEA0447	4
39200	LEA0447	4

CUMMINS

01912346	LES0479	40
0191-2346	LES0479	40
01912354	LES0578	43
0191-2354	LES0578	43
0191-2361	LEA0481	12
01912362	LEA0772	25
0191-2362	LEA0772	25
01912363	LES0695	40
0191-2363	LES0695	40
135160	LES0450	45
135161	LES0450	45
135163	LES0450	45
173006	LES0450	45
173007	LES0450	45
1912354	LES0578	43
216037	LEA0485	18
216038	LEA0485	18
216039	LEA0485	18
2346	LES0479	40
3010125RX	LES0651	45
3011895	LES0313	45
3020678	LEA0692	25
3021036	LES0450	45
3021038	LES0651	45
3088320	LEA0628	28
3250087	LEA1182	26
3256759	LEA1182	26
3256759RX	LEA1182	26
3279007	LEA1182	26
32821554	LEA0619	14

REFERENCE NO/LUCASELEKTRIK NO/PAGE

3282554	LEA0619	14
3282554	LEA1302	14
3283329	LES0479	40
3283330	LES0479	40
3284392	LEA0692	25
3575205	LES0734	31
3575205RX	LES0735	31
3603857RX	LEA0485	18
3603858RX	LEA0485	18
3603859RX	LEA0485	18
3603868RX	LES0651	45
3603888RX	LES0651	45
3604321RX	LES0450	45
3604323RX	LES0325	41
3604448RX	LEA0080	5
3604484RX	LES0313	45
3604648	LES0479	40
3604648RX	LES0479	40
3604654	LES0479	40
3604784RX	LES0313	45
3629351	LEA0628	28
3675204	LES0202	44
39002661	LES0313	45
3901365	LES0479	40
3901386	LES0479	40
3904445	LES0479	40
3905480	LES0479	40
3907821	LES0313	45
3909914	LES0202	44
3910566	LEA1182	26
391056600	LEA1182	26
3910646	LES0450	45
3911248	LEA0080	5
3911249	LEA0692	25
3916854	LES0479	40
3918377	LES0202	44
3920678	LEA0692	25
3920679	LEA0080	5
39206791	LEA0080	5
3935070	LES0479	40

REFERENCE NO/LUCASELEKTRIK NO/PAGE

3938502	LES0313	45
3939028	LEA0081	21
3939028	LEA0692	25
3964745	LEA1182	26
3975139	LEA1182	26
4081235	LES0651	45
550117	LEA1182	26
555241	LES0450	45
859605PB	LEA1182	26
C4929600	LES0202	44
CCA006AX	LEA1182	26
CCA00700	LEA1182	26
DAF		
1244090	LEA1137	28
1254010	LEA1137	28
1340893	LEA1202	19
1516533R	LEA0169	21
181991	LEA0477	23
666754	LEA1137	28
AELB633	LEA1182	26
DELCO REMY		
10413558	LES0313	45
10455500	LES0202	44
10461021	LES0325	41
10461024	LES0450	45
10461030	LES0450	45
10461031	LES0313	45
10461043	LES0450	45
10461057	LES0651	45
10461125	LES0651	45
10461128	LES0450	45
10461136	LES0313	45
10461184	LES0450	45
10461259	LES0450	45
10461357	LES0313	45
10465168	LES0197	35
10465296	LES0197	35
10465403	LES0479	40
10465407	LES0479	40
10465440	LES0735	31

REFERENCE NO/LUCASELEKTRIK NO/PAGE

10465584	LES0735	31
10478880	LES0651	45
10478911	LES0651	45
10478912	LES0651	45
10478943	LES0450	45
10478986	LES0450	45
10478998	LES0450	45
10479111	LES0450	45
10479114	LES0450	45
10479115	LES0313	45
10479136	LES0313	45
10479225	LES0313	45
10479290	LES0450	45
10479339	LES0651	45
10479340	LES0651	45
10479343	LES0651	45
10479616	LES0202	44
10479623	LES0202	44
10479630	LES0137	35
110447	LES0281	30
1107872	LES0652	37
1109222	LES0651	45
1109253	LES0652	37
1109261	LES0652	37
1109285	LES0651	45
1109286	LES0651	45
1109287	LES0651	45
1109288	LES0651	45
1109289	LES0651	45
1109290	LES0651	45
1109291	LES0651	45
1109292	LES0651	45
1109293	LES0651	45
1109296	LES0651	45
1109385	LES0651	45
1109494	LES0651	45
1109553	LES0651	45
1109631	LES0651	45
1109636	LES0651	45
1109638	LES0651	45

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

1109642	LES0651	45
1109643	LES0651	45
1109647	LES0651	45
1109649	LES0651	45
1109661	LES0651	45
1109755	LES0651	45
1109759	LES0651	45
1109768	LES0651	45
1109771	LES0651	45
1109772	LES0651	45
1109773	LES0651	45
1109774	LES0651	45
1109775	LES0651	45
1109776	LES0651	45
1109777	LES0651	45
1109778	LES0651	45
1109780	LES0651	45
1109782	LES0651	45
1109787	LES0651	45
1109788	LES0651	45
1109789	LES0651	45
1109791	LES0651	45
1109798	LES0651	45
1109838	LES0651	45
1109839	LES0651	45
1109840	LES0651	45
1109841	LES0651	45
1109842	LES0651	45
1109845	LES0651	45
1109846	LES0651	45
1109960	LES0651	45
1109961	LES0651	45
1109965	LES0651	45
1109972	LES0651	45
1109973	LES0651	45
1109977	LES0651	45
1109978	LES0651	45
1109979	LES0651	45
1109986	LES0651	45
1109987	LES0651	45

1113266	LES0197	35
1113267	LES0197	35
1113269	LES0197	35
1113277	LES0202	44
1113281	LES0652	37
1113282	LES0652	37
1113283	LES0137	35
1113291	LES0202	44
1113295	LES0197	35
1113296	LES0197	35
1113594	LES0202	44
1113923	LES0313	45
1114114	LES0325	41
1114129	LES0325	41
1114138	LES0325	41
1114141	LES0325	41
1114152	LES0325	41
1114156	LES0325	41
1114158	LES0325	41
1114162	LES0325	41
1114167	LES0325	41
1114174	LES0325	41
1114175	LES0325	41
1114190	LES0325	41
1114704	LES0325	41
1114705	LES0325	41
1114708	LES0325	41
1114724	LES0325	41
1114748	LES0325	41
1114754	LES0325	41
1114791	LES0325	41
1114802	LES0325	41
1114824	LES0325	41
1114826	LES0325	41
1114827	LES0325	41
1114828	LES0325	41
1114832	LES0325	41
1114833	LES0325	41
1114834	LES0325	41
1114977	LES0325	41

12486	LEA0670	18
19020535	LEA0692	25
19020536	LEA0081	21
19020536	LEA0692	25
19024202	LES0401	42
19024232	LES0401	42
19024253	LES0401	42
19024256	LES0401	42
19024267	LES0555	32
19024272	LES0351	38
19024274	LES0452	42
19025055	LEA0593	7
19025056	LEA0593	7
19025057	LEA0320	20
19025097	LEA0169	21
19025102	LEA0169	21
19025104	LEA1182	26
19025331	LEA1137	28
19025361	LEA1137	28
19025787	LEA0599	8
19070148	LES0626	44
19083004	LES0626	44
19083022	LES0472	39
19083024	LES0477	35
19083027	LES0346	34
19084010	LES0453	43
19093008	LEA0882	25
19093012	LEA0868	13
19093019	LEA0920	16
1990229	LES0651	45
1990231	LES0651	45
1990235	LES0651	45
1990237	LES0651	45
1990239	LES0651	45
1990248	LES0651	45
1990249	LES0651	45
1990250	LES0651	45
1990251	LES0651	45
1990259	LES0651	45
1990260	LES0651	45

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

1990262	LES0651	45
1990263	LES0651	45
1990264	LES0651	45
1990266	LES0651	45
1990268	LES0651	45
1990269	LES0651	45
1990270	LES0651	45
1990271	LES0651	45
1990272	LES0651	45
1990273	LES0651	45
1990274	LES0651	45
1990276	LES0651	45
1990290	LES0325	41
1990304	LES0325	41
1990325	LES0325	41
1990344	LES0450	45
1990356	LES0325	41
1990359	LES0313	45
1990361	LES0450	45
1990367	LES0450	45
1990368	LES0450	45
1990378	LES0450	45
1990382	LES0450	45
1990383	LES0450	45
1990384	LES0450	45
1990388	LES0450	45
1990409	LES0450	45
1990410	LES0450	45
1990418	LES0450	45
1990429	LES0325	41
1990433	LES0313	45
1990437	LES0450	45
1990453	LES0313	45
1990456	LES0450	45
1990457	LES0313	45
1990460	LES0450	45
1990485	LES0450	45
1990493	LES0450	45
1990497	LES0313	45
1990703	LES0325	41

1993802	LES0450	45
1993804	LES0313	45
1993805	LES0450	45
1993809	LES0313	45
1993810	LES0450	45
1993814	LES0313	45
1993840	LES0651	45
1993902	LES0313	45
1998488	LES0202	44
323-677	LES0249	32
3472026	LEA0073	3
3472037	LEA0073	3
3472038	LEA0073	3
3472048	LEA0073	3
3472049	LEA0073	3
3472059	LEA0073	3
3472061	LEA0073	3
3472105	LEA0075	9
3472106	LEA0075	9
3472606	LEA0075	9
3472706	LEA0075	9
3493606	LEA0075	9
8000193	LES0249	32
8000282	LES0249	32
9000763	LES0249	32
9000820	LES0249	32
9000822	LES0249	32
9000840	LES0249	32
9000850	LES0249	32
9000884	LES0249	32
9000884-12B1	LES0249	32
9000885	LES0249	32
9000895	LES0249	32
93028	LEA0081	21
93032	LEA0920	16
DA0920	LEA0886	17
DA1153	LEA0626	16
DA1250	LEA0864	2
DA1250N	LEA0864	2
DA1857	LEA0882	25

DA1857N	LEA0882	25
DA1948	LEA0873	17
DA2223	LEA1030	27
DA2257	LEA1148	8
DA2448	LEA0868	13
DA2448N	LEA0868	13
DA4668	LEA1137	28
DA5328	LEA1012	13
DA5720	LEA1137	28
DA9810N	LEA0886	17
DB7110	LEA0867	13
DB7140	LEA0873	17
DRA0043	LEA0626	16
DRA0130	LEA0076	3
DRA0130	LEA0500	1
DRA0140	LEA0864	2
DRA0140N	LEA0864	2
DRA0267	LEA0628	28
DRA0310	LEA0510	20
DRA0747	LEA0882	25
DRA0747N	LEA0882	25
DRA0748	LEA0891	17
DRA0750	LEA0586	7
DRA0838	LEA0873	17
DRA0870	LEA0073	3
DRA0880	LEA0073	3
DRA0970	LEA0593	7
DRA0970	LEA0594	7
DRA0970	LEA0605	8
DRA0970	LEA1148	8
DRA0980	LEA0593	7
DRA0980	LEA0594	7
DRA0980	LEA0599	8
DRA1113	LEA1030	27
DRA1147	LEA1148	8
DRA1260	LEA0510	20
DRA1338	LEA0868	13
DRA1338N	LEA0868	13
DRA1340	LEA0320	20
DRA1340	LEA0590	21

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

DRA1410	LEA0613	1
DRA2101	LEA0593	7
DRA2101	LEA0594	7
DRA2101	LEA0599	8
DRA2720	LEA0169	21
DRA3013	LEA0584	7
DRA3245	LEA1012	13
DRA3286	LEA0038	5
DRA3354	LEA0593	7
DRA3354	LEA0594	7
DRA3354	LEA0599	8
DRA3355	LEA0610	4
DRA3527	LEA0461	26
DRA3540	LEA0510	20
DRA3587	LEA0638	16
DRA3599	LEA1182	26
DRA3603	LEA1182	26
DRA3608	LEA1182	26
DRA3623	LEA0478	12
DRA3679	LEA0638	16
DRA3785	LEA1182	26
DRA3840	LEA0345	22
DRA3940	LEA0584	7
DRA4076	LEA1291	9
DRA4218	LEA1012	13
DRA4266	LEA0826	18
DRA4370	LEA0345	22
DRA4610	LEA1137	28
DRA4650	LEA0075	9
DRA5630	LEA0593	7
DRA5910	LEA0526	20
DRA6750	LEA0599	8
DRA6800	LEA0920	16
DRA7890	LEA0076	3
DRA9800	LEA0586	7
DRA9810	LEA0886	17
DRA9810N	LEA0886	17
DRB0280	LEA0619	14
DRB0290	LEA0080	5
DRB3130	LEA1202	19

REFERENCE NO/LUCASELEKTRIK NO/PAGE

DRB6000	LEA0867	13
DRB6030	LEA0873	17
DRB6290	LEA0630	27
DRS0026	LES0391	38
DRS0129	LES0384	45
DRS0167	LES0453	43
DRS0167N	LES0453	43
DRS0235	LES0281	30
DRS0255	LES0152	37
DRS0265	LES0626	44
DRS1013	LES0195	34
DRS1280	LES0452	42
DRS1330	LES0401	42
DRS2720	LES0483	39
DRS2780	LES0237	39
DRS3226	LES0179	30
DRS3247	LES0734	31
DRS3267	LES0090	33
DRS3306	LES0478	34
DRS3319	LES0471	35
DRS3325	LES0404	38
DRS3405	LES0351	38
DRS3510	LES0202	44
DRS3676	LES0090	33
DRS3770	LES0682	44
DRS3778	LES0090	33
DRS3958	LES0522	31
DRS3966	LES0281	30
DRS4890	LES0186	31
DRS5090	LES0090	33
DRS6550	LES0472	39
DRS6550N	LES0472	39
DRS7970	LES0477	35
DRS7970N	LES0477	35
DRS9020	LES0199	38
DRS9040	LES0556	30
DRS9820	LES0346	34
DRT1000	LES0319	42
DRZ5104	LES0651	45
DRZ5115	LES0313	45

REFERENCE NO/LUCASELEKTRIK NO/PAGE

DRZ5167	LES0450	45
DRZ5168	LES0202	44
DRZ5170	LES0249	32
DRZ5175	LES0325	41
DRZ5176	LES0197	35
DS0150	LES0556	30
DS1277	LES0453	43
DS1277N	LES0453	43
DS1375	LES0626	44
DS2123	LES0195	34
DS2390	LES0452	42
DS3780	LES0351	38
DS3830	LES0483	39
DS4416	LES0478	34
DS4429	LES0471	35
DS4880	LES0682	44
DS5068	LES0522	31
DS7660	LES0472	39
DS7660N	LES0472	39
DS9080	LES0477	35
DS9080N	LES0477	35
DZ6214	LES0651	45
RAS30151	LES0556	30
DENSO		
028000-0710	LES0734	31
028000-4200	LES0179	30
028000-4201	LES0179	30
028000-4520	LES0281	30
028000-4990	LES0179	30
028000-4991	LES0179	30
028000-5730	LES0734	31
028000-6260	LES0179	30
028000-6261	LES0179	30
028000-7640	LES0735	31
028000-8320	LES0281	30
028000-8321	LES0281	30
028000-8322	LES0281	30
028000-8400	LES0137	35
028000-8401	LES0137	35
028000-8402	LES0137	35

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

028000-8403	LES0137	35
028000-8404	LES0137	35
100211-453	LEA0561	1
101211-994	LEA0248	10
101211-9940	LEA0248	10
121120-77011	LES0734	31
128000-0050	LES0281	30
128000-0110	LES0734	31
128000-0111	LES0735	31
128000-0141	LES0179	30
128000-0170	LES0179	30
128000-0171	LES0179	30
128000-0180	LES0179	30
128000-0181	LES0179	30
128000-0710	LES0734	31
128000-0711	LES0735	31
128000-0740	LES0735	31
128000-0741	LES0735	31
128000-3590	LES0281	30
128000-3591	LES0281	30
128000-5261	LES0281	30
128000-5590	LES0739	29
128000-5720	LES0152	37
128000-5721	LES0152	37
128000-5722	LES0152	37
128000-6640	LES0179	30
128000-7300	LES0735	31
128000-9050	LES0281	30
128000-9051	LES0281	30
128000-9950	LES0281	30
128000-9951	LES0281	30
128000-9958	LES0281	30
228000-0110	LES0735	31
228000-0111	LES0735	31
228000-0140	LES0735	31
228000-0141	LES0735	31
228000-0142	LES0735	31
228000-0150	LES0281	30
228000-0250	LES0735	31
228000-0251	LES0735	31

228000-0660	LES0179	30
228000-0661	LES0179	30
228000-0662	LES0179	30
228000-0663	LES0179	30
228000-0664	LES0179	30
228000-0790	LES0281	30
228000-0791	LES0281	30
228000-0800	LES0281	30
228000-0950	LES0281	30
228000-0951	LES0281	30
228000-0970	LES0281	30
228000-0971	LES0281	30
228000-0980	LES0281	30
228000-0981	LES0281	30
228000-0990	LES0281	30
228000-0991	LES0281	30
228000-1020	LES0179	30
228000-1021	LES0179	30
228000-1022	LES0179	30
228000-1060	LES0281	30
228000-1061	LES0281	30
228000-1080	LES0179	30
228000-1081	LES0179	30
228000-1082	LES0179	30
228000-1530	LES0281	30
228000-1531	LES0281	30
228000-3660	LES0281	30
228000-3730	LES0735	31
228000-3731	LES0735	31
228000-3732	LES0735	31
228000-3780	LES0735	31
228000-3800	LES0735	31
228000-3801	LES0735	31
228000-3802	LES0735	31
228000-4920	LES0179	30
228000-4921	LES0179	30
228000-4922	LES0179	30
228000-5730	LES0152	37
228000-5731	LES0152	37
228000-5750	LES0740	29

228000-5910	LES0281	30
228000-6320	LES0281	30
228000-6321	LES0281	30
228000-6470	LES0137	35
228000-6560	LES0748	46
228000-6561	LES0748	46
228000-7110	LES0735	31
228000-7111	LES0735	31
228000-7150	LES0281	30
228000-7151	LES0281	30
228000-7410	LES0748	46
228000-7411	LES0748	46
228000-7412	LES0748	46
228000-7413	LES0748	46
228000-7610	LES0281	30
228000-7611	LES0281	30
228000-7670	LES0281	30
228000-7671	LES0281	30
428000-1160	LES0281	30
428000-1161	LES0281	30
428000-1590	LES0739	29
428000-1591	LES0739	29
428000-2190	LES0739	29
428000-2191	LES0739	29
428000-2192	LES0739	29
428000-2640	LES0281	30
9702800840	LES0137	35
9702809840	LES0137	35
DAN008	LEA0638	16
DAN609	LEA1148	8
DAN616	LEA0599	8
DSN2027	LES0748	46
DSN2069	LES0735	31
DSN2084	LES0179	30
DSN2137	LES0739	29
DEUTZ AG (KHD)		
01162339	LEA0586	7
01163626	LES0319	42
01163752	LEA0586	7
01163753	LEA0586	7

REFERENCE NO/LUCASELEKTRIK NO/PAGE

01171638	LEA0586	7
01173560	LES0626	44
01173820	LES0319	42
01179468	LEA0526	20
01179586	LES0319	42
01180804	LES0319	42
01180805	LES0472	39
01180999	LES0319	42
01181745	LEA0868	13
01182038	LEA0868	13
01182124	LES0346	34
01182235	LES0319	42
01182931	LES0319	42
01182933	LES0626	44
01183122	LES0319	42
01183239	LES0319	42
01183243	LES0626	44
01183246	LES0626	44
01183365	LES0346	34
01183451	LEA0526	20
01183620	LEA0868	13
01183636	LEA0526	20
01183681	LES0319	42
01183685	LES0626	44
01183716	LES0319	42
01183720	LES0626	44
01183850	LEA0526	20
03047129	LES0626	44
1173560	LES0626	44
1180758	LEA1202	19
1182933	LES0626	44
1183243	LES0626	44
1183246	LES0626	44
1183685	LES0626	44
1183720	LES0626	44
12850977	LEA1291	9
12911594	LEA0586	7
3047129	LES0626	44

DEUTZ DITER

930310710026	LEA0076	3
--------------	---------	---

REFERENCE NO/LUCASELEKTRIK NO/PAGE

930310710026	LEA0500	1
FIAT		
116760506000	LEA0599	8
116760506000	LEA0605	8
116760506000	LEA1148	8
116760506100	LEA1148	8
2022506	LES0351	38
2022506	LES0352	40
2022507	LES0351	38
2022507	LES0352	40
2022610	LEA1148	8
294391300	LEA1148	8
294392000	LEA1148	8
2961928	LES0404	38
4169093	LES0351	38
4169093	LES0352	40
4169096	LES0351	38
4172113	LES0351	38
4172113	LES0352	40
4224325	LEA1148	8
42498145	LES0401	42
42498165	LEA1148	8
42498212	LES0401	42
42498239	LEA1148	8
42498240	LEA1148	8
42522730	LEA0500	1
4257074	LEA1148	8
4273601	LEA0593	7
4273601	LEA0594	7
4275283	LEA0599	8
4330483	LEA0593	7
4330483	LEA0594	7
4330483	LEA0599	8
4335424	LEA0593	7
4335424	LEA0594	7
4335424	LEA0599	8
4370266	LEA0613	1
4373601	LEA0599	8
4382200	LEA0593	7
4382200	LEA0594	7

REFERENCE NO/LUCASELEKTRIK NO/PAGE

4382200	LEA0599	8
4382203	LEA0593	7
4382203	LEA0594	7
4382203	LEA0599	8
4383392	LEA0613	1
4383393	LEA0613	1
4386883	LEA0593	7
4386883	LEA0594	7
4386883	LEA0599	8
4392831	LEA0599	8
4395131	LEA0599	8
4424346	LEA0593	7
4424346	LEA0594	7
4424346	LEA0599	8
4424347	LEA0613	1
4424546	LEA0593	7
4424546	LEA0594	7
4424546	LEA0599	8
4460681	LEA0593	7
4460681	LEA0594	7
4460681	LEA0599	8
4470411	LEA0593	7
4470411	LEA0594	7
4470411	LEA0599	8
4474729	LEA0593	7
4474729	LEA0594	7
4474729	LEA0599	8
4474752	LEA1148	8
4475266	LEA0593	7
4475266	LEA0594	7
4475268	LEA0593	7
4475268	LEA0594	7
4475303	LEA0593	7
4475303	LEA0594	7
4475303	LEA0599	8
4478678	LEA0593	7
4478678	LEA0594	7
4478678	LEA0599	8
46231680	LEA1148	8
46231723	LEA0593	7

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

46231723	LEA0594	7
46231723	LEA0599	8
46231725	LEA0593	7
46231725	LEA0594	7
46231725	LEA0599	8
46231726	LEA0593	7
46231735	LEA0593	7
46231735	LEA0594	7
46231735	LEA0599	8
46231745	LEA0593	7
46231745	LEA0594	7
46231746	LEA0593	7
46231746	LEA0594	7
46231746	LEA0599	8
46231751	LEA0593	7
46231751	LEA0594	7
46231751	LEA0599	8
46231752	LEA0593	7
46231752	LEA0594	7
46231752	LEA0599	8
46231753	LEA0593	7
46231753	LEA0594	7
46231753	LEA0599	8
46231755	LEA0593	7
46231755	LEA0594	7
46231755	LEA0599	8
46231756	LEA0607	8
46231758	LEA0593	7
46231760	LEA0593	7
46231760	LEA0594	7
46231760	LEA0599	8
46231786	LEA0599	8
46231786	LEA0605	8
46231786	LEA1148	8
4643171	LEA0593	7
4643171	LEA0594	7
46445094	LEA0593	7
46445094	LEA0594	7
46445094	LEA0599	8
46445096	LEA0593	7

46445096	LEA0594	7
46446292	LEA0593	7
46446292	LEA0594	7
46446292	LEA0599	8
4682998	LES0351	38
4692478	LES0352	40
4699405	LES0352	40
4699705	LES0351	38
4699705	LES0352	40
4702248	LES0351	38
4702248	LES0352	40
4703751	LES0351	38
4706008	LES0401	42
4710224	LES0351	38
4711700	LEA0593	7
4711700	LEA0594	7
4711700	LEA0599	8
4711700	LEA1148	8
47132888	LES0391	38
47137534	LES0391	38
4713806	LES0483	39
4715701	LES0352	40
4715786	LEA0320	20
4715786	LEA0590	21
4716026	LES0401	42
4716062	LES0401	42
4717871	LEA0320	20
4717871	LEA0590	21
4717872	LEA0320	20
4720511	LEA0593	7
4720511	LEA0594	7
4720511	LEA0599	8
4720511	LEA1148	8
4721578	LEA1148	8
4721587	LEA0593	7
4721587	LEA0594	7
4721587	LEA0599	8
4721587	LEA1148	8
4721588	LEA0593	7
4721588	LEA0594	7

4721588	LEA0599	8
4721588	LEA1148	8
4721589	LEA0599	8
4721589	LEA0605	8
4721589	LEA1148	8
4721591	LEA0599	8
4721591	LEA0605	8
4721591	LEA1148	8
4721592	LEA0599	8
4721592	LEA0605	8
4721592	LEA1148	8
4721890	LEA0320	20
4721890	LEA0590	21
47220501	LEA1148	8
4722502	LEA1148	8
4722682	LES0351	38
4722724	LEA0320	20
4722724	LEA0590	21
4728682	LES0351	38
4731839	LEA0599	8
4731839	LEA0605	8
4731839	LEA1148	8
4737755	LES0351	38
4737755	LES0352	40
4737756	LES0401	42
4737759	LES0483	39
4738563	LEA0320	20
4738563	LEA0590	21
4738568	LEA0320	20
4738569	LEA0320	20
4738569	LEA0590	21
4738570	LEA0320	20
4738570	LEA0590	21
4738571	LEA0320	20
4738571	LEA0590	21
4738772	LEA0320	20
4738772	LEA0590	21
4738775	LEA0320	20
4738775	LEA0590	21
4739353	LES0351	38

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

4745929	LES0351	38
4746400	LEA1148	8
4750583	LEA0593	7
4750583	LEA0594	7
4750583	LEA0605	8
4750583	LEA1148	8
4755109	LES0351	38
4755109	LES0352	40
4755110	LES0483	39
4755111	LES0401	42
4759929	LES0351	38
4763996	LES0352	40
4765931	LEA0593	7
4765931	LEA0594	7
4765933	LEA0593	7
4765933	LEA0594	7
4765934	LEA0593	7
4765934	LEA0594	7
4769911	LEA1148	8
4780974	LES0651	45
4783538	LEA0593	7
4783538	LEA0594	7
4783538	LEA0599	8
4786913	LEA0320	20
4786913	LEA0590	21
4787590	LEA0593	7
4787590	LEA0594	7
4787594	LEA1148	8
4787596	LEA1148	8
4787597	LEA1148	8
4787598	LEA1148	8
4787663	LEA0593	7
4787663	LEA0594	7
4787663	LEA0599	8
4787665	LEA0593	7
4787665	LEA0594	7
4787665	LEA0605	8
4787668	LEA0593	7
4787668	LEA0594	7
4787671	LEA0593	7

4787671	LEA0594	7
4787673	LEA0593	7
4787673	LEA0594	7
4787673	LEA0599	8
4789893	LEA0593	7
4789893	LEA0594	7
4789893	LEA0599	8
4800504	LEA0593	7
4800504	LEA0594	7
4807373	LES0351	38
4807375	LES0351	38
4807375	LES0352	40
4807376	LES0483	39
4807379	LES0401	42
4808495	LEA1148	8
4808497	LEA1148	8
4808498	LEA1148	8
4808499	LEA1148	8
4808503	LEA0599	8
4808503	LEA0605	8
4808505	LEA0599	8
4808505	LEA0605	8
4808505	LEA1148	8
4808506	LEA0593	7
4808506	LEA0594	7
4808507	LEA0610	4
4808510	LEA0593	7
4808510	LEA0594	7
4808511	LEA0593	7
4808515	LEA0593	7
4808515	LEA0594	7
4808515	LEA0599	8
4808517	LEA0593	7
4808517	LEA0594	7
4808518	LEA0593	7
4808518	LEA0594	7
4808519	LEA0320	20
4808519	LEA0590	21
4808526	LEA0320	20
4808526	LEA0590	21

4808528	LEA0320	20
4808528	LEA0590	21
4832942	LES0352	40
4849157	LEA0593	7
4988513	LES0351	38
4998353	LEA1148	8
50012833	LEA0593	7
50012833	LEA0594	7
50012833	LEA0599	8
500333271	LES0351	38
500333271	LES0352	40
5101645	LEA0593	7
5101645	LEA0594	7
5111319	LES0351	38
5920974	LEA0593	7
5920974	LEA0594	7
5920974	LEA0599	8
5927869	LEA0593	7
5927869	LEA0594	7
5927869	LEA0599	8
5928295	LEA0593	7
5928295	LEA0594	7
5928295	LEA0599	8
5930312	LEA0593	7
5930312	LEA0594	7
5930312	LEA0599	8
5930512	LEA0593	7
5930512	LEA0594	7
5930512	LEA0599	8
5931925	LEA0593	7
5931925	LEA0594	7
5931925	LEA0599	8
5931926	LEA0593	7
5931926	LEA0594	7
5931926	LEA0599	8
5943452	LEA0593	7
5943452	LEA0594	7
5943452	LEA0599	8
5949413	LEA0593	7
5949413	LEA0594	7

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

5949413	LEA0599	8
5958396	LEA0593	7
5958396	LEA0594	7
5958396	LEA0599	8
5960287	LEA0593	7
5960287	LEA0594	7
5960287	LEA0599	8
5960292	LEA0593	7
5960292	LEA0594	7
5960292	LEA0599	8
5962647	LEA0593	7
5962647	LEA0594	7
5962647	LEA0599	8
5970230	LEA0593	7
5970230	LEA0594	7
5970230	LEA0599	8
5970874	LEA0593	7
5970874	LEA0594	7
5970874	LEA0599	8
5972197	LEA0593	7
5972197	LEA0594	7
5973035	LEA0593	7
5973035	LEA0594	7
5973035	LEA0599	8
5976915	LEA0593	7
5976915	LEA0594	7
5976915	LEA0599	8
5990766	LEA0593	7
5990766	LEA0594	7
5990766	LEA0599	8
5992148	LEA0593	7
5992148	LEA0594	7
5992148	LEA0599	8
5992152	LEA0593	7
5992152	LEA0594	7
5992152	LEA0599	8
5996593	LEA0593	7
5996593	LEA0594	7
5996593	LEA0599	8
60806873	LEA0593	7

60806873	LEA0594	7
6081165	LEA0593	7
6081165	LEA0594	7
60811650	LEA0593	7
60811650	LEA0594	7
61664307	LEA0593	7
61664307	LEA0594	7
61664307	LEA0599	8
62231786	LEA1148	8
71780127	LEA0593	7
71780127	LEA0594	7
7546759	LEA0593	7
7546759	LEA0594	7
7546759	LEA0599	8
7547680	LEA0593	7
7552264	LEA0607	8
7552284	LEA0593	7
7552284	LEA0594	7
7552284	LEA0599	8
7552458	LEA0593	7
7552458	LEA0594	7
7552458	LEA0599	8
7552459	LEA0593	7
7552459	LEA0594	7
7552459	LEA0599	8
7565244	LEA0593	7
7565244	LEA0594	7
7565244	LEA0599	8
7565265	LEA0593	7
7565265	LEA0594	7
7565265	LEA0599	8
7565395	LEA0593	7
7565560	LEA0593	7
7565560	LEA0594	7
7565560	LEA0599	8
7575998	LEA0593	7
7575998	LEA0594	7
7575998	LEA0599	8
7580206	LEA0593	7
7580206	LEA0594	7

7580206	LEA0599	8
7596904	LEA0593	7
7596904	LEA0594	7
7596904	LEA0599	8
7597066	LEA0593	7
7597066	LEA0594	7
7597066	LEA0599	8
7634289	LEA0599	8
7646189	LEA0599	8
7646261	LEA0593	7
7646261	LEA0594	7
7647595	LEA0593	7
7647595	LEA0594	7
7651812	LEA0593	7
7651812	LEA0594	7
7651812	LEA0599	8
7651813	LEA0593	7
7651813	LEA0594	7
7651813	LEA0599	8
7675207	LEA0593	7
7675207	LEA0594	7
7675207	LEA0599	8
7691663	LEA0593	7
7691663	LEA0594	7
7697863	LEA0599	8
7697870	LEA0593	7
7697870	LEA0594	7
7697870	LEA0599	8
77028550	LEA1148	8
77050262	LES0401	42
77050550	LEA0320	20
77050550	LEA0590	21
77050562	LES0401	42
77138410	LEA1148	8
77211411	LEA0599	8
77218410	LEA0613	1
77250410	LEA1148	8
77323410	LEA0593	7
77323410	LEA0594	7
77323410	LEA0599	8

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

77323411	LEA0593	7
77323411	LEA0594	7
77323411	LEA0599	8
77323415	LEA0593	7
77323415	LEA0594	7
77323415	LEA0599	8
77338410	LEA0593	7
77338410	LEA0594	7
77338410	LEA0599	8
77340410	LEA0593	7
77340410	LEA0594	7
77340410	LEA0599	8
77340411	LEA0593	7
77340411	LEA0594	7
77340411	LEA0599	8
77412410	LEA0607	8
77416410	LEA0593	7
77416410	LEA0594	7
77416410	LEA0599	8
77452410	LEA0593	7
77510410	LEA0593	7
77510410	LEA0594	7
77510410	LEA0599	8
77510411	LEA0593	7
77510411	LEA0594	7
77510411	LEA0599	8
77515410	LEA1148	8
77515411	LEA0599	8
77515411	LEA0605	8
77515411	LEA1148	8
77523410	LEA0593	7
77523410	LEA0594	7
77523410	LEA0599	8
7754833	LEA0599	8
77612410	LEA0593	7
77612410	LEA0594	7
77612410	LEA0599	8
82300531	LEA0593	7
82300531	LEA0594	7
82300531	LEA0599	8

REFERENCE NO/LUCASELEKTRIK NO/PAGE

8230531	LEA0593	7
8230531	LEA0594	7
8230531	LEA0599	8
88205005	LES0351	38
88205006	LES0352	40
88206010	LEA1148	8
88206020	LEA0320	20
88206020	LEA0590	21
98417133	LEA0320	20
98417134	LEA0320	20
98417201	LEA0320	20
98417208	LEA0590	21
98417209	LEA0590	21
99457034	LEA1148	8
AT050600108	LEA0593	7
AT050600108	LEA0594	7
AT050600108	LEA0599	8
DM2130	LES0351	38
DM2134	LES0351	38
DM2138	LES0351	38
DM92137	LES0351	38
FORD		
1008813	LES0090	33
1S4U11000AA	LES0090	33
5023587	LES0090	33
5023593	LES0090	33
6173461	LEA0584	7
6177073	LES0090	33
6203381	LES0090	33
7412672	LES0090	33
82RB10346AA	LEA1182	26
89AB11000CA	LES0090	33
91AB11000HA	LES0090	33
91AB11000HB	LES0090	33
97BB11000BB	LES0090	33
97BB11000BC	LES0090	33
98AB11000AD	LES0090	33
D4HZ10346N	LEA0485	18
D7HT10300CA	LEA0485	18
D7HT10300DA	LEA0485	18

REFERENCE NO/LUCASELEKTRIK NO/PAGE

D7HT10300EA	LEA0485	18
D8HZ10346A	LEA0485	18
D8HZ10346B	LEA0485	18
D8HZ10346C	LEA0485	18
E4TF11000AA	LES0479	40
E8HT10300JA	LEA0485	18
E8HT10300KA	LEA0485	18
E8HZ10346J	LEA0485	18
E9HT10300BA	LEA0485	18
SAEJ1171	LES0249	32
GENERAL MOTORS		
323-446	LES0197	35
711925	LEA0485	18
HATZ		
000050476102	LES0477	35
40000901	LES0477	35
50183500	LES0477	35
50366500	LEA0586	7
50476102	LES0477	35
5050440	LEA0586	7
505044010913	LEA0586	7
HELLA		
8EA012528-241	LES0522	31
8EA012586-511	LES0453	43
8EA012586-561	LES0452	42
8EA015642-201	LES0739	29
8EA0732856-001	LES0450	45
8EA725972-001	LES0186	31
8EA726089-001	LES0090	33
8EA726139-001	LES0453	43
8EA726142-001	LES0401	42
8EA726161-001	LES0186	31
8EA726196-001	LES0351	38
8EA726253-001	LES0452	42
8EA730183-001	LES0090	33
8EA730198-001	LES0483	39
8EA730270-001	LES0281	30
8EA730275-001	LES0179	30
8EA732680-001	LES0202	44
8EA732894-001	LES0556	30

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

8EA737130-001	LES0137	35
8EA737252-001	LES0237	39
8EA737270-001	LES0197	35
8EA737629-001	LES0199	38
8EA737959-001	LES0249	32
8EA738184-001	LES0522	31
8EA738258-311	LES0090	33
8EA738259-291	LES0453	43
8EL011710-351	LEA0599	8
8EL011711-041	LEA1012	13
8EL011711-601	LEA0826	18
8EL012584-291	LEA1137	28
8EL012584-381	LEA1137	28
8EL725581-001	LEA0599	8
8EL725582-001	LEA0073	3
8EL725583-001	LEA0593	7
8EL725583-001	LEA0594	7
8EL725584-001	LEA0169	21
8EL725604-001	LEA0169	21
8EL725640-001	LEA0320	20
8EL725640-001	LEA0590	21
8EL725641-001	LEA0584	7
8EL725649-001	LEA0169	21
8EL725673-001	LEA0593	7
8EL725673-001	LEA0594	7
8EL725673-001	LEA0599	8
8EL725673-001	LEA1148	8
8EL725714-001	LEA0584	7
8EL725718-001	LEA0599	8
8EL725718-001	LEA1148	8
8EL725742-001	LEA0586	7
8EL725757-001	LEA0075	9
8EL725757-001	LEA0593	7
8EL725759-001	LEA0593	7
8EL725759-001	LEA0594	7
8EL725759-001	LEA0605	8
8EL725774-001	LEA0586	7
8EL725799-001	LEA0345	22
8EL725805-001	LEA0593	7
8EL725805-001	LEA0594	7

8EL725813-001	LEA0075	9
8EL725817-001	LEA0345	22
8EL725855-001	LEA0556	6
8EL725866-001	LEA0038	5
8EL725883-001	LEA0593	7
8EL725883-001	LEA0594	7
8EL725899-001	LEA0864	2
8EL725903-001	LEA0586	7
8EL725911-001	LEA0038	5
8EL725936-001	LEA0586	7
8EL725941-001	LEA0169	21
8EL725943-001	LEA0500	1
8EL725960-001	LEA0073	3
8EL730007-001	LEA1148	8
8EL730028-001	LEA1012	13
8EL730040-001	LEA0478	12
8EL730041-001	LEA0478	12
8EL730042-001	LEA0477	23
8EL730047-001	LEA0169	21
8EL730137-001	LEA0628	28
8EL731686-001	LEA1012	13
8EL731708-001	LEA0920	16
8EL731718-001	LEA0495	26
8EL731719-001	LEA0495	26
8EL732874-001	LEA0461	26
8EL737017-001	LEA0886	17
8EL737211-001	LEA0638	16
8EL737212-001	LEA1206	13
8EL737213-001	LEA1182	26
8EL737214-001	LEA1182	26
8EL737217-001	LEA0080	5
8EL737218-001	LEA0619	14
8EL737224-001	LEA0419	3
8EL737275-001	LEA0437	10
8EL737299-001	LEA1137	28
8EL737520-001	LEA0638	16
8EL737619-001	LEA0593	7
8EL737619-001	LEA0594	7
8EL737619-001	LEA0599	8
8EL737647-001	LEA0320	20

8EL737651-001	LEA0586	7
8EL737704-001	LEA1202	19
8EL737739-001	LEA0873	17
8EL738001-001	LEA0670	18
8EL738131-001	LEA0826	18
8EL738211-121	LEA0630	27
8EL738231-001	LEA1202	19
8EL749556-001	LEA1148	8
CA1049IR	LEA0461	26
CA1068IR	LEA0886	17
CA1130IR	LES0199	38
CA1191IR	LEA0638	16
CA1192IR	LEA1206	13
CA1193IR	LEA1182	26
CA1197IR	LEA0080	5
CA1198IR	LEA0619	14
CA119IR	LEA0613	1
CA1201IR	LEA0437	10
CA127IR	LEA0599	8
CA128IR	LEA0073	3
CA129IR	LEA0593	7
CA129IR	LEA0594	7
CA130IR	LEA0169	21
CA1337IR	LEA0638	16
CA1435IR	LEA0593	7
CA1435IR	LEA0594	7
CA1435IR	LEA0599	8
CA1448IR	LEA0320	20
CA1450IR	LEA0586	7
CA1480IR	LEA1202	19
CA1493IR	LEA0873	17
CA155IR	LEA0169	21
CA1667IR	LEA1137	28
CA1673	LEA0670	18
CA1757	LEA0826	18
CA1757IR	LEA0826	18
CA1849IR	LEA1148	8
CA1853IR	LEA0630	27
CA212IR	LEA0320	20
CA212IR	LEA0590	21

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

CA227IR	LEA0169	21
CA22H	LEA0584	7
CA255IR	LEA0593	7
CA255IR	LEA0594	7
CA255IR	LEA0599	8
CA312IR	LEA0584	7
CA316IR	LEA0599	8
CA316IR	LEA0605	8
CA339IR	LEA0586	7
CA353IR	LEA0075	9
CA355IR	LEA0593	7
CA355IR	LEA0594	7
CA355IR	LEA0605	8
CA369IR	LEA0526	20
CA37IR	LEA0586	7
CA4001	LEA1182	26
CA4002	LEA1182	26
CA4004	LEA1182	26
CA4005	LEA1182	26
CA4023	LEA1182	26
CA500IR	LEA0345	22
CA506IR	LEA0593	7
CA506IR	LEA0594	7
CA514IR	LEA0075	9
CA518IR	LEA0345	22
CA564IR	LEA0556	6
CA582IR	LEA0038	5
CA601IR	LEA0593	7
CA601IR	LEA0594	7
CA616IR	LEA0864	2
CA627IR	LEA0038	5
CA62IR	LEA0586	7
CA709IR	LEA1148	8
CA70IR	LEA0586	7
CA730IR	LEA1012	13
CA742IR	LEA0478	12
CA743IR	LEA0478	12
CA744IR	LEA0477	23
CA749IR	LEA0169	21
CA75IR	LEA0169	21

REFERENCE NO/LUCASELEKTRIK NO/PAGE

CA76IR	LEA0500	1
CA825IR	LEA1012	13
CA847IR	LEA0920	16
CA857IR	LEA0495	26
CA858IR	LEA0495	26
CA99IR	LEA0073	3
CS1035	LES0237	39
CS1130	LES0199	38
CS119	LES0186	31
CS1258	LES0249	32
CS1328	LES0522	31
CS1396	LES0090	33
CS1474	LES0453	43
CS240	LES0351	38
CS240	LES0352	40
CS335	LES0404	38
CS341	LES0090	33
CS391	LES0453	43
CS394	LES0401	42
CS515	LES0186	31
CS572	LES0351	38
CS613	LES0090	33
CS682	LES0483	39
CS807	LES0556	30
CS887	LES0472	39
CS97	LES0452	42
CS996	LES0404	38
JA1169IR	LEA0419	3
JS1239	LES0735	31
JS730	LES0281	30
JS734	LES0179	30
JS908	LES0281	30
JS929	LES0137	35
US1240	LES0249	32
US823	LES0313	45
US827	LES0651	45
US843	LES0652	37
US857	LES0202	44
US970	LES0197	35
8EL015643-131	LEA1302	14

REFERENCE NO/LUCASELEKTRIK NO/PAGE

HELWAN DIESEL		
1177481	LEA0071	2
HITACHI		
136955	LES0740	29
136959	LES0113	34
2506955	LES0740	29
2506959	LES0113	34
S114-116	LES0735	31
S114-450	LES0735	31
S114-655	LES0740	29
S114-655A	LES0740	29
S114-655D	LES0740	29
S114-815	LES0072	30
S114-815A	LES0072	30
S114-817	LES0072	30
S13-124	LES0113	34
S13-132	LES0113	34
S13-204	LES0195	34
S13-294	LES0113	34
S13-332	LES0113	34
S13-404	LES0195	34
S13-41	LES0113	34
S13-41A	LES0113	34
S13-41B	LES0113	34
S13-41C	LES0113	34
S13-41D	LES0113	34
S13-78	LES0113	34
S13-94	LES0113	34
S13-94A	LES0113	34
IMR		
817788	LEA0510	20
ISKRA		
11.130.201	LES0404	38
11.130.203	LES0351	38
11.130.248	LES0478	34
11.130.403	LES0351	38
11.130.409	LES0351	38
11.130.432	LES0471	35
11.130.490	LES0401	42
11.130.521	LES0404	38

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

11.130.525	LES0478	34
11.130.567	LES0472	39
11.130.612	LES0471	35
11.130.647	LES0090	33
11.130.687	LES0453	43
11.130.697	LES0483	39
11.130.734	LES0596	43
11.130.741	LES0626	44
11.130.743	LES0452	42
11.130.810	LES0697	41
11.130.838	LES0477	35
11.130.841	LES0199	38
11.130.842	LES0319	42
11.130.993	LES0682	44
11.131.002	LES0357	29
11.131.140	LES0477	35
11.131.266	LES0578	43
11.131.352	LES0391	38
11.131.356	LES0695	40
11.131.357	LES0578	43
11.131.359	LES0202	44
11.131.398	LES0696	40
11.131.399	LES0581	43
11.131.458	LES0346	34
11.131.602	LES0697	41
11.131.770	LES0319	42
11.131.781	LES0393	39
11.131.868	LES0626	44
11.131.905	LES0313	45
11.131.916	LES0237	39
11.131.928	LES0556	30
11.131.948	LES0346	34
11.131.949	LES0346	34
11.132.106	LES0596	43
11.132.176	LES0596	43
11.132.180	LES0479	40
11.132.196	LES0346	34
11.132.302	LES0578	43
11.139.229	LES0452	42
11.139.313	LES0249	32

11.139.411	LES0090	33
11.201.052	LEA0510	20
11.201.055	LEA0320	20
11.201.055	LEA0590	21
11.201.069	LEA0510	20
11.201.096	LEA0076	3
11.201.096	LEA0500	1
11.201.112	LEA0599	8
11.201.186	LEA0510	20
11.201.214	LEA0073	3
11.201.219	LEA0586	7
11.201.226	LEA0502	6
11.201.276	LEA0584	7
11.201.304	LEA0599	8
11.201.309	LEA0073	3
11.201.327	LEA0605	8
11.201.336	LEA0610	4
11.201.372	LEA0449	9
11.201.435	LEA1175	4
11.201.444	LEA0586	7
11.201.457	LEA0594	7
11.201.463	LEA1148	8
11.201.502	LEA1062	2
11.201.507	LEA0864	2
11.201.555	LEA0597	25
11.201.570	LEA0502	6
11.201.571	LEA0599	8
11.201.578	LEA0556	6
11.201.591	LEA0599	8
11.201.696	LEA0607	8
11.201.711	LEA1291	9
11.201.723	LEA0478	12
11.201.742	LEA0532	24
11.201.745	LEA0437	10
11.201.753	LEA0483	24
11.201.754	LEA1012	13
11.201.759	LEA0081	21
11.201.801	LEA0169	21
11.201.832	LEA0437	10
11.201.902	LEA1137	28

11.201.928	LEA0073	3
11.201.932	LEA0075	9
11.201.935	LEA0080	5
11.201.937	LEA0345	22
11.201.938	LEA0478	12
11.201.939	LEA0477	23
11.201.940	LEA0587	9
11.201.941	LEA0692	25
11.201.956	LEA0437	10
11.203.063	LEA0867	13
11.203.100	LEA1279	27
11.203.104	LEA0437	10
11.203.150	LEA1134	21
11.203.186	LEA0867	13
11.203.205	LEA0638	16
11.203.232	LEA1137	28
11.203.268	LEA0619	14
11.203.308	LEA0896	15
11.203.332	LEA0886	17
11.203.353	LEA0484	24
11.203.396	LEA0882	25
11.203.397	LEA0867	13
11.203.398	LEA0868	13
11.203.403	LEA1134	21
11.203.404	LEA0526	20
11.203.405	LEA0502	6
11.203.415	LEA0586	7
11.203.416	LEA1207	16
11.203.439	LEA0512	24
11.203.461	LEA0772	25
11.203.462	LEA0481	12
11.203.483	LEA0626	16
11.203.573	LEA0461	26
11.203.637	LEA0626	16
11.203.638	LEA0626	16
11.203.639	LEA0626	16
11.203.659	LEA1173	26
11.203.660	LEA0887	15
11.203.661	LEA0888	17
11.203.670	LEA0478	12

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

11.203.842	LEA0626	16
11.203.843	LEA0897	15
11.203.998	LEA0478	12
11.204.036	LEA0868	13
11.204.049	LEA0893	15
11.204.052	LEA0526	20
11.204.062	LEA0869	14
11.204.149	LEA1202	19
11.204.152	LEA0873	17
11.204.391	LEA0920	16
11.204.395	LEA0903	12
11.204.396	LEA0887	15
11.204.405	LEA0626	16
11.204.413	LEA0888	17
11.204.463	LEA0893	15
11.204.479	LEA0898	18
11.204.539	LEA0967	2
11.204.569	LEA0888	17
11.204.584	LEA1279	27
11.204.639	LEA0626	16
11.204.641	LEA0898	18
11.204.686	LEA0891	17
11.204.708	LEA0893	15
11.204.772	LEA0626	16
11.204.880	LEA0502	6
11.204.884	LEA0502	6
11.205.024	LEA0902	10
11.205.070	LEA1206	13
11.205.071	LEA0869	14
11.209.434	LEA0169	21
11.209.436	LEA0345	22
11.209.437	LEA0345	22
11.209.443	LEA0610	4
11.209.463	LEA0500	1
11.209.479	LEA0526	20
11.209.604	LEA0630	27
11.209.647	LEA0500	1
11203524	LEA0893	15
AAG1311	LEA0076	3
AAG1328	LEA0449	9

AAG1340	LEA1062	2
AAG1341	LEA0864	2
AAG1366	LEA0864	2
AAG1370	LEA0500	1
AAG1376	LEA0500	1
AAG3315	LEA0864	2
AAK1110	LEA0320	20
AAK1110	LEA0590	21
AAK1115	LEA0510	20
AAK1135	LEA0599	8
AAK1167	LEA0510	20
AAK1181	LEA0073	3
AAK1182	LEA0586	7
AAK1189	LEA0502	6
AAK1337	LEA0526	20
AAK1370	LEA0586	7
AAK1375	LEA0478	12
AAK1378	LEA0502	6
AAK1381	LEA0532	24
AAK1382	LEA0437	10
AAK1385	LEA0483	24
AAK1387	LEA0081	21
AAK1398	LEA0169	21
AAK1805	LEA0626	16
AAK1806	LEA0626	16
AAK1807	LEA0626	16
AAK1814	LEA1173	26
AAK1815	LEA0887	15
AAK1816	LEA0888	17
AAK1818	LEA0478	12
AAK1873	LEA0626	16
AAK1874	LEA0897	15
AAK3130	LEA0073	3
AAK3133	LEA0075	9
AAK3197	LEA0610	4
AAK3301	LEA0437	10
AAK3330	LEA0080	5
AAK3332	LEA0345	22
AAK3333	LEA0478	12
AAK3334	LEA0477	23

AAK3335	LEA0587	9
AAK3336	LEA0692	25
AAK3346	LEA0437	10
AAK3370	LEA0437	10
AAK3379	LEA1134	21
AAK3540	LEA1175	4
AAK3547	LEA0586	7
AAK3560	LEA0594	7
AAK3563	LEA1148	8
AAK3802	LEA0478	12
AAK3817	LEA0893	15
AAK3820	LEA0526	20
AAK3830	LEA0869	14
AAK4118	LEA0584	7
AAK4138	LEA0593	7
AAK4138	LEA0594	7
AAK4138	LEA0599	8
AAK4142	LEA0073	3
AAK4143	LEA0073	3
AAK4153	LEA0605	8
AAK4162	LEA0610	4
AAK4307	LEA0619	14
AAK4313	LEA0586	7
AAK4315	LEA0896	15
AAK4321	LEA0886	17
AAK4331	LEA0772	25
AAK4332	LEA0484	24
AAK4335	LEA0772	25
AAK4347	LEA1134	21
AAK4348	LEA0526	20
AAK4349	LEA0502	6
AAK4351	LEA0586	7
AAK4352	LEA1207	16
AAK4357	LEA0512	24
AAK4362	LEA0772	25
AAK4363	LEA0481	12
AAK4368	LEA0626	16
AAK4376	LEA0898	18
AAK4378	LEA0893	15
AAK4507	LEA0597	25

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

AAK4518	LEA0599	8
AAK4523	LEA0556	6
AAK4536	LEA0599	8
AAK4569	LEA1291	9
AAK4620	LEA0502	6
AAK4624	LEA0502	6
AAK4663	LEA0902	10
AAK4674	LEA1206	13
AAK4675	LEA0869	14
AAK4829	LEA0920	16
AAK4830	LEA0903	12
AAK4831	LEA0887	15
AAK4834	LEA0626	16
AAK4835	LEA0888	17
AAK4849	LEA0893	15
AAK4855	LEA0898	18
AAK4875	LEA0967	2
AAK4889	LEA0888	17
AAK4921	LEA0626	16
AAK4923	LEA0898	18
AAK4937	LEA0891	17
AAK4945	LEA0893	15
AAK4984	LEA0626	16
AAK5131	LEA1012	13
AAK5335	LEA0868	13
AAK5336	LEA0867	13
AAK5365	LEA1279	27
AAK5391	LEA0867	13
AAK5396	LEA0638	16
AAK5517	LEA0461	26
AAK5565	LEA0882	25
AAK5566	LEA0867	13
AAK5567	LEA0868	13
AAK5717	LEA0461	26
AAK5852	LEA1279	27
AAN3114	LEA0169	21
AAN3116	LEA0345	22
AAN3117	LEA0345	22
AAN5308	LEA1202	19
AAN5311	LEA0873	17

AAN5393	LEA0630	27
AAT1310	LEA1137	28
AAT1330	LEA1137	28
AK4557	LEA0593	7
AK4557	LEA0607	8
AZD2127	LES0556	30
AZE2127	LES0249	32
AZE2523	LES0090	33
AZE2617	LES0357	29
AZE4102	LES0090	33
AZE4150	LES0393	39
AZE4170	LES0393	39
AZE4173	LES0393	39
AZE4193	LES0237	39
AZE4253	LES0479	40
AZE4256	LES0346	34
AZE6509	LES0346	34
AZE6554	LES0346	34
AZE6555	LES0346	34
AZF4103	LES0696	40
AZF4104	LES0581	43
AZF4154	LES0697	41
AZF4198	LES0319	42
AZF4233	LES0626	44
AZF4298	LES0596	43
AZF4322	LES0596	43
AZF4360	LES0578	43
AZF4514	LES0199	38
AZF4515	LES0319	42
AZF4575	LES0578	43
AZF4591	LES0391	38
AZF4592	LES0695	40
AZF4593	LES0578	43
AZF4594	LES0202	44
AZG4687	LES0313	45
AZJ0101	LES0555	32
AZJ2263	LES0452	42
AZJ3110	LES0351	38
AZJ3115	LES0351	38
AZJ3116	LES0351	38

AZJ3123	LES0471	35
AZJ3131	LES0401	42
AZJ3149	LES0404	38
AZJ3150	LES0478	34
AZJ3179	LES0472	39
AZJ3192	LES0471	35
AZJ3231	LES0453	43
AZJ3237	LES0483	39
AZJ3256	LES0596	43
AZJ3258	LES0477	35
AZJ3262	LES0626	44
AZJ3263	LES0452	42
AZJ3291	LES0477	35
AZJ3332	LES0697	41
AZJ3351	LES0682	44
AZJ3386	LES0477	35
AZJ3496	LES0452	42
AZJ3515	LES0401	42
AZJ3517	LES0351	38
AZJ3535	LES0351	38
AZJ3537	LES0404	38
AZJ3538	LES0351	38
AZJ3551	LES0555	32
AZJ3552	LES0478	34
AZJ3582	LES0351	38
IA0055	LEA0320	20
IA0055	LEA0590	21
IA0069	LEA0510	20
IA0096	LEA0500	1
IA0112	LEA0599	8
IA0186	LEA0510	20
IA0226	LEA0502	6
IA0276	LEA0584	7
IA0309	LEA0073	3
IA0327	LEA0605	8
IA0336	LEA0610	4
IA0372	LEA0500	1
IA0435	LEA1175	4
IA0457	LEA0594	7
IA0463	LEA1148	8

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

IA0499	LEA0586	7
IA0502	LEA1062	2
IA0507	LEA0864	2
IA0511	LEA0449	9
IA0555	LEA0597	25
IA0570	LEA0502	6
IA0571	LEA0599	8
IA0578	LEA0556	6
IA0583	LEA0075	9
IA0591	LEA0599	8
IA0595	LEA0080	5
IA0696	LEA0607	8
IA0710	LEA0345	22
IA0711	LEA1291	9
IA0723	LEA0478	12
IA0742	LEA0532	24
IA0745	LEA0437	10
IA0746	LEA0477	23
IA0747	LEA0587	9
IA0753	LEA0483	24
IA0754	LEA1012	13
IA0759	LEA0692	25
IA0796	LEA0071	2
IA0801	LEA0169	21
IA0832	LEA0437	10
IA0902	LEA1137	28
IA0918	LEA1279	27
IA0956	LEA0437	10
IA1023	LEA0868	13
IA1024	LEA0867	13
IA1052	LEA0867	13
IA1057	LEA1202	19
IA1076	LEA0882	25
IA1078	LEA0502	6
IA1079	LEA0526	20
IA1080	LEA1134	21
IA1095	LEA0873	17
IA1096	LEA1137	28
IA1127	LEA0461	26
IA1134	LEA0638	16

REFERENCE NO/LUCASELEKTRIK NO/PAGE

IA1154	LEA0886	17
IA1179	LEA0512	24
IA1181	LEA0891	17
IA1189	LEA0896	15
IA1190	LEA0484	24
IA1202	LEA1207	16
IA1213	LEA0481	12
IA1214	LEA0772	25
IA1216	LEA1173	26
IA1248	LEA0902	10
IA1272	LEA0898	18
IA1299	LEA0903	12
IA1309	LEA0887	15
IA1310	LEA0888	17
IA1326	LEA0893	15
IA1348	LEA0619	14
IA1382	LEA0626	16
IA1390	LEA0897	15
IA1438	LEA1206	13
IA1450	LEA0869	14
IA1518	LEA0920	16
IA1522	LEA0626	16
IA1542	LEA0898	18
IA1572	LEA0967	2
IA1635	LEA0626	16
IA9419	LEA0169	21
IA9421	LEA0345	22
IA9422	LEA0345	22
IA9430	LEA0610	4
IA9452	LEA0630	27
IS0201	LES0404	38
IS0203	LES0351	38
IS0248	LES0478	34
IS0366	LES0483	39
IS0403	LES0351	38
IS0409	LES0351	38
IS0432	LES0471	35
IS0490	LES0401	42
IS0521	LES0404	38
IS0525	LES0478	34

REFERENCE NO/LUCASELEKTRIK NO/PAGE

IS0567	LES0472	39
IS0612	LES0471	35
IS0619	LES0199	38
IS0647	LES0090	33
IS0687	LES0453	43
IS0741	LES0626	44
IS0743	LES0452	42
IS0810	LES0697	41
IS0838	LES0477	35
IS0841	LES0199	38
IS0842	LES0319	42
IS0993	LES0682	44
IS1015	LES0357	29
IS1033	LES0477	35
IS1073	LES0346	34
IS1090	LES0479	40
IS1117	LES0578	43
IS1118	LES0695	40
IS1129	LES0696	40
IS1130	LES0581	43
IS1140	LES0202	44
IS1168	LES0697	41
IS1179	LES0313	45
IS1201	LES0393	39
IS1217	LES0346	34
IS1246	LES0626	44
IS1255	LES0319	42
IS1279	LES0556	30
IS1322	LES0237	39
IS1347	LES0596	43
IS1397	LES0346	34
IS9313	LES0249	32
IS9332	LES0090	33
IS9527	LES0452	42
11.201.727	LEA1303	14
11.201.875	LEA1302	14
11.203.159	LEA1303	14
AAK5123	LEA1303	14
AAK5165	LEA1302	14
AAK5378	LEA1303	14

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

IA0727	LEA1303	14
IA0875	LEA1302	14
IVECO		
1171617	LEA0500	1
1177481	LEA0500	1
1179882	LEA1137	28
1368020	LES0401	42
285217	LES0391	38
2859527	LES0391	38
2995030	LEA0593	7
2995030	LEA0594	7
2995030	LEA0610	4
323019050	LES0391	38
3311950R91	LEA1182	26
42498594	LEA0320	20
42498628	LEA0320	20
42522730	LEA0076	3
42522730	LEA0500	1
42522730	LEA0502	6
42522737	LEA0526	20
42522949	LEA1137	28
4716026	LES0401	42
4755111	LES0401	42
4780974	LES0651	45
4807376	LES0483	39
504021528	LEA1137	28
504031929	LES0391	38
504036476	LES0391	38
504060771	LEA0619	14
504075799	LEA0626	16
504075799	LEA0888	17
504357109	LES0391	38
50435711	LES0391	38
504357110	LES0391	38
50436476	LES0391	38
5043676	LES0391	38
5801577137	LES0391	38
5801577138	LES0391	38
79014078	LEA0597	25
92901946	LEA1182	26

92901947	LEA1182	26
92901970	LEA1182	26
98417208	LEA0320	20
98417209	LEA0320	20
98417212	LEA0320	20
99457074	LEA1148	8
99461495	LEA1148	8
JOHN DEERE		
121120-77010	LES0734	31
69X51907A	LEA0903	12
69X51908A	LEA0903	12
AE53101	LEA0886	17
AH137883	LEA0619	14
AH137883	LEA1303	14
AH165975	LEA0888	17
AL111675	LEA0867	13
AL111676	LEA0873	17
AL114092	LEA0867	13
AL114093	LEA0873	17
AL119537	LEA0880	19
AL12148	LEA0081	21
AL12148	LEA0692	25
AL171541	LEA0880	19
AL207586	LEA0920	16
AL207589	LEA0886	17
AL60033	LEA0920	16
AL78689	LEA0886	17
AL78690	LEA0920	16
AL78692	LEA0886	17
AL81437	LEA0920	16
AL81438	LEA0886	17
AM877740	LEA0561	1
AM878415	LES0735	31
AR102188	LES0325	41
AT161324	LEA0692	25
AT173624	LEA0080	5
AT175194	LEA0619	14
AT211995	LES0195	34
AT220394	LEA0619	14
AT78689	LEA0886	17

AZ38462	LEA0920	16
CH12084	LES0734	31
CH12741	LES0734	31
CH15586	LES0735	31
CH19279	LES0735	31
CH19284	LES0734	31
MIU800612	LES0739	29
RE133942	LES0313	45
RE19275	LES0137	35
RE28782	LES0313	45
RE36267	LEA0619	14
RE38364	LES0313	45
RE38633	LES0325	41
RE41756	LES0325	41
RE41799	LES0137	35
RE501050	LES0748	46
RE501060	LES0748	46
RE501150	LES0748	46
RE505895	LEA0903	12
RE505896	LEA0619	14
RE505896	LEA1303	14
RE51447	LES0137	35
RE51694	LES0137	35
RE519629	LEA0903	12
RE522334	LES0578	43
RE523953	LEA0481	12
RE525689	LEA0481	12
RE525690	LEA0772	25
RE533516	LEA0903	12
RE533653	LEA0887	15
RE533654	LEA0888	17
RE535653	LEA0619	14
RE536008	LES0695	40
RE536490	LES0695	40
RE540412	LEA0481	12
RE540413	LEA0772	25
RE54092	LES0137	35
RE540925	LES0137	35
RE553516	LEA0080	5
RE63094	LES0313	45

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

RE69591	LES0313	45
RE69705	LES0748	46
RE70958	LES0748	46
REX51907B	LEA0903	12
RG60654	LES0735	31
SE501342	LEA0619	14
SE501343	LEA0888	17
SE501347	LEA0920	16
SE501387	LEA0080	5
SE501406	LES0748	46
SE501447	LES0735	31
SE501833	LEA0630	27
SE501835	LEA0692	25
SE502626	LEA0903	12
SE502627	LEA0887	15
SE502628	LEA0888	17
SE502733	LES0578	43
TY24322	LEA0081	21
TY24322	LEA0692	25
TY24443	LES0748	46
TY24485	LEA0619	14
TY24486	LEA0886	17
TY25954	LEA0920	16
TY6648	LES0734	31
TY6673	LES0734	31
TY6688	LES0137	35
TY6715	LES0734	31
TY6717	LES0735	31
TY6719	LES0137	35
TY6730	LES0325	41
TY6750	LEA0619	14
TY6774	LEA0081	21
TY6774	LEA0692	25
TY6777	LEA0886	17
TY6778	LEA0920	16
TY6779	LEA0920	16
TY6793	LEA0886	17

KOMATSU

1268855H91	LES0202	44
58400070	LES0471	34

REFERENCE NO/LUCASELEKTRIK NO/PAGE

YM129900-77010	LES0195	34
LISTER-PETTER		
20244940	LES0682	44
204-13273	LES0032	32
36202344	LEA0437	10
36202349	LEA1195	10

LOMBARDINI

0011572700	LEA1291	9
1005821194	LES0186	31
11572610	LEA0864	2
11572620	LEA1062	2
11572700	LEA1291	9
58400070	LES0471	35
58400450	LES0471	35
58400670	LES0471	35
58401420	LES0357	29
5840147	LES0186	31
58401470	LES0186	31
58401940	LES0556	30
58402090	LES0556	30
5840224	LES0186	31
58402240	LES0186	31
58402480	LES0357	29
58402610	LES0471	35
58402680	LES0471	35
ED0011572700	LEA1291	9
SA475	LEA0593	7
SA475	LEA0594	7
SA476	LEA0593	7
SA476	LEA0594	7
SA958	LEA0593	7
SA958	LEA0594	7
SA958	LEA0599	8

LUCAS / LUCAS ELEKTRIK A.S.

24049	LEA0584	7
24158	LEA0556	6
24161	LEA0038	5
24171	LEA0449	9
24209	LEA0556	6
26270J	LES0032	31

REFERENCE NO/LUCASELEKTRIK NO/PAGE

24228	LEA0038	5
24240	LEA0038	5
24241	LEA0038	5
24242	LEA0038	5
24245	LEA0556	6
24290	LEA0038	5
24291	LEA0556	6
24297	LEA0038	5
24356	LEA0556	6
24390	LEA0556	6
24418	LEA0070	5
26270	LES0032	32
26270H	LES0032	32
26270J	LES0032	32
27410	LES0032	32
27410A	LES0032	32
54022054	LEA0556	6
54022058	LEA0038	5
54022060	LEA0038	5
54022140	LEA0038	5
54022143	LEA0556	6
54022162	LEA0038	5
54022164	LEA0556	6
54022176	LEA0556	6
54022179	LEA0038	5
54022189	LEA0038	5
54022191	LEA0556	6
54022192	LEA0038	5
54022193	LEA0556	6
54022204	LEA0556	6
54022216	LEA0556	6
54022220	LEA0038	5
54022229	LEA0556	6
54022235	LEA0038	5
54022242	LEA0556	6
54022244	LEA0556	6
54022249	LEA0038	5
54022254	LEA0038	5
54022255	LEA0556	6
54022256	LEA0038	5

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

54022261	LEA0038	5
54022262	LEA0556	6
54022282	LEA0556	6
54022283	LEA0038	5
54022286	LEA0038	5
54022287	LEA0038	5
54022306	LEA0556	6
54022309	LEA0038	5
54022346	LEA0038	5
54022379	LEA0038	5
54022390	LEA0038	5
54022391	LEA0556	6
54022393	LEA0038	5
54022398	LEA0038	5
54022409	LEA0556	6
54022428	LEA0556	6
54022439	LEA0556	6
54022445	LEA0038	5
54022452	LEA0556	6
54022482	LEA0556	6
54022483	LEA0556	6
54022510	LEA0038	5
54022536	LEA0556	6
54022552	LEA0038	5
54022554	LEA0556	6
54022591	LEA0038	5
54022616	LEA0556	6
54022634	LEA0556	6
54022635	LEA0038	5
54022636	LEA0556	6
54022637	LEA0038	5
54022641	LEA0038	5
54022642	LEA0556	6
54022643	LEA0038	5
54022648	LEA0038	5
54022664	LEA0070	5
61920623	LEA1182	26

LUCAS AFTER MARKET

LRA00131	LEA0584	7
LRA00137	LEA0593	7

LRA00137	LEA0594	7
LRA00137	LEA0599	8
LRA00190	LEA0605	8
LRA00307	LEA0613	1
LRA00313	LEA0073	3
LRA00346	LEA0073	3
LRA00463	LEA0038	5
LRA00474	LEA0345	22
LRA00582	LEA0584	7
LRA00584	LEA0076	3
LRA00611	LEA0864	2
LRA00612	LEA0500	1
LRA00712	LEA0593	7
LRA00712	LEA0594	7
LRA00712	LEA0599	8
LRA00751	LEA0607	8
LRA00779	LEA0593	7
LRA00779	LEA0594	7
LRA00779	LEA0599	8
LRA00786	LEA0075	9
LRA00819	LEA0075	9
LRA00839	LEA0320	20
LRA00886	LEA0075	9
LRA00924	LEA0510	20
LRA00926	LEA0169	21
LRA00928	LEA0597	25
LRA00972	LEA0345	22
LRA00974	LEA1137	28
LRA01178	LEA0437	10
LRA01192	LEA0478	12
LRA01246	LEA1206	13
LRA01339	LEA0419	3
LRA01439	LEA0478	12
LRA01442	LEA0478	12
LRA01447	LEA1012	13
LRA01568	LEA1148	8
LRA01579	LEA1291	9
LRA01656	LEA0478	12
LRA01860	LEA0867	13
LRA01915	LEA1148	8

LRA01926	LEA0417	6
LRA01926	LEA0418	6
LRA01960	LEA0419	3
LRA01980	LEA0561	1
LRA02065	LEA0416	5
LRA02138	LEA1202	19
LRA02144	LEA0248	10
LRA02182	LEA0670	18
LRA02227	LEA0670	18
LRA02234	LEA0880	19
LRA02378	LEA0320	20
LRA02429	LEA0477	23
LRA02436	LEA0081	21
LRA02463	LEA0477	23
LRA02474	LEA0461	26
LRA02482	LEA0526	20
LRA02485	LEA1137	28
LRA02495	LEA0692	25
LRA02503	LEA0477	23
LRA02569	LEA0073	3
LRA02580	LEA0610	4
LRA02672	LEA0586	7
LRA02688	LEA0920	16
LRA02698	LEA0886	17
LRA02731	LEA0619	14
LRA02769	LEA1012	13
LRA02774	LEA0169	21
LRA02775	LEA0345	22
LRA02801	LEA0630	27
LRA02891	LEA0826	18
LRA03074	LEA0496	27
LRA03181	LEA0868	13
LRA03473	LEA0626	16
LRA03503	LEA1279	27
LRA03540	LEA0772	25
LRA03673	LEA1207	16
LRA03712	LEA1030	27
LRA03816	LEA0891	17
LRA1579	LEA1291	9
LRA313	LEA0073	3

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

LRA346	LEA0073	3
LRA461	LEA0556	6
LRA463	LEA0038	5
LRA474	LEA0345	22
LRA582	LEA0584	7
LRA693	LEA0038	5
LRA779	LEA0593	7
LRA779	LEA0594	7
LRA779	LEA0599	8
LRA819	LEA0075	9
LRA839	LEA0320	20
LRA924	LEA0510	20
LRA972	LEA0345	22
LRB00104	LEA0169	21
LRB00134	LEA0076	3
LRB00134	LEA0502	6
LRB00143	LEA1012	13
LRB00207	LEA0638	16
LRB00294	LEA0920	16
LRB00300	LEA0590	21
LRB00305	LEA0080	5
LRB00306	LEA0495	26
LRB00384	LEA0638	16
LRB00603	LEA1182	26
LRB00606	LEA1182	26
LRB00607	LEA1182	26
LRB00609	LEA1182	26
LRB00612	LEA1182	26
LRB00613	LEA1182	26
LRB00614	LEA1182	26
LRB00616	LEA1182	26
LRB00617	LEA1182	26
LRB00618	LEA1182	26
LRB00623	LEA1182	26
LRB00624	LEA1182	26
LRB00626	LEA1182	26
LRB00627	LEA1182	26
LRB00628	LEA1182	26
LRB00629	LEA1182	26
LRB00648	LEA1182	26

LRB00652	LEA1182	26
LRB00653	LEA1182	26
LRB104	LEA0169	21
LRB134	LEA0071	2
LRB134	LEA0076	3
LRB134	LEA0502	6
LRB305	LEA0080	5
LRB603	LEA1182	26
LRB606	LEA1182	26
LRB607	LEA1182	26
LRB609	LEA1182	26
LRB612	LEA1182	26
LRB613	LEA1182	26
LRB614	LEA1182	26
LRB616	LEA1182	26
LRB617	LEA1182	26
LRB618	LEA1182	26
LRB623	LEA1182	26
LRB624	LEA1182	26
LRB626	LEA1182	26
LRB627	LEA1182	26
LRB628	LEA1182	26
LRB629	LEA1182	26
LRB648	LEA1182	26
LRB652	LEA1182	26
LRB653	LEA1182	26
LRS00163	LES0090	33
LRS00182	LES0351	38
LRS00182	LES0352	40
LRS00555	LES0032	32
LRS00733	LES0090	33
LRS00808	LES0186	31
LRS00841	LES0401	42
LRS00847	LES0351	38
LRS00925	LES0453	43
LRS00930	LES0452	42
LRS00956	LES0471	35
LRS00987	LES0472	39
LRS01007	LES0555	32
LRS01103	LES0483	39

LRS01125	LES0735	31
LRS01129	LES0179	30
LRS01135	LES0281	30
LRS01169	LES0281	30
LRS01187	LES0652	37
LRS01190	LES0556	30
LRS01202	LES0477	35
LRS01206	LES0113	34
LRS01225	LES0179	30
LRS01230	LES0652	37
LRS01250	LES0237	39
LRS01262	LES0478	34
LRS01312	LES0734	31
LRS01332	LES0179	30
LRS01333	LES0179	30
LRS01359	LES0197	35
LRS01387	LES0137	35
LRS01401	LES0197	35
LRS01408	LES0479	40
LRS01439	LES0186	31
LRS01526	LES0281	30
LRS01531	LES0072	30
LRS01565	LES0195	34
LRS01573	LES0740	29
LRS01603	LES0199	38
LRS01617	LES0072	30
LRS01620	LES0404	38
LRS01626	LES0734	31
LRS01629	LES0281	30
LRS01646	LES0249	32
LRS01755	LES0346	34
LRS01794	LES0249	32
LRS01800	LES0249	32
LRS01801	LES0522	31
LRS01837	LES0450	45
LRS01845	LES0682	44
LRS01898	LES0596	43
LRS01904	LES0313	45
LRS01915	LES0450	45
LRS01936	LES0319	42

REFERENCE NO/LUCASELEKTRIK NO/PAGE

LRS01946	LES0651	45
LRS02114	LES0280	29
LRS02175	LES0453	43
LRS02308	LES0281	30
LRS02358	LES0578	43
LRS02407	LES0391	38
LRS02448	LES0202	44
LRS02477	LES0393	39
LRS02659	LES0384	45
LRS02673	LES0346	34
LRS02709	LES0739	29
LRS02771	LES0281	30
LRS03797	LES0221	33
LRS04104	LES0281	30
LRS163	LES0090	33
LRS555	LES0032	32
LRS808	LES0186	31
LRT00161	LES0186	31
LRT00163	LES0090	33
LRT00192	LES0357	29
LRT161	LES0186	31
LRT163	LES0090	33
NAB411	LEA0038	5
NAB412	LEA0556	6
NAB9000M	LEA0441	11
NAB900M	LEA0441	11
NAB901M	LEA0442	22
NAB902M	LEA0445	11
NAB904M	LEA0445	11
NAB905M	LEA0443	11

LUCAS ELEKTRIK A.S.

61920118	LEA0071	2
61920193	LEA0556	6
61920201	LEA0073	3
61920203	LEA0075	9
61920207	LEA0076	3
61920207	LEA0449	9
61920207	LEA0502	6
61920215	LEA0080	5
61920216	LEA0081	21

REFERENCE NO/LUCASELEKTRIK NO/PAGE

61920269	LEA0593	7
61920269	LEA0594	7
61920269	LEA0599	8
61920270	LEA0451	1
61920271	LEA0450	20
61920382	LEA0615	4
61920607	LEA1195	10
61920671	LEA0438	11
61920672	LEA0439	22
61920673	LEA0440	22
61920674	LEA0441	11
61920675	LEA0442	22
61920676	LEA0443	11
61920677	LEA0444	23
61920678	LEA0445	11
61920679	LEA0446	23
61920680	LEA0534	12
61920682	LEA0485	18
61924011	LES0404	38
61924066	LES0223	33
61924067	LES0224	42
61924094	LES0351	38
61924095	LES0352	40
61924109	LES0357	29
61924138	LES0682	44
61924155	LES0351	38
61924204	LES0393	39
61990391	LES0391	38
61990393	LES0393	39

LUCAS MARINE

47020054	LEA0438	11
47020055	LEA0437	10
47020056	LEA0438	11
47020057	LEA0437	10
47020058	LEA0438	11
47020059	LEA0437	10
47020060	LEA0440	22
47020061	LEA0439	22
47020062	LEA0438	11
47020063	LEA0438	11

REFERENCE NO/LUCASELEKTRIK NO/PAGE

47020065	LEA0437	10
47020067	LEA0437	10
47020068	LEA0437	10
47020069	LEA0438	11
47020083	LEA0439	22
47020084	LEA0437	10
47020086	LEA0437	10
47020088	LEA0437	10
47020089	LEA0437	10
47020090	LEA0439	22
47920026	LES0245	36
47920027	LES0220	36
47920027	LES0244	36
47920034	LES0221	33
47920034A	LES0221	33
47920096	LES0219	32
47920149	LES0245	36
47920150	LES0244	36
47920166	LES0221	33

MAGNETI MARELLI

063207138010	LES0404	38
063216741010	LES0401	42
063216831010	LES0352	40
063216896010	LES0483	39
063280008010	LES0090	33
063320049010	LEA0593	7
063321042010	LEA1148	8
063321112010	LEA0593	7
063321424010	LEA1148	8
063521070240	LES0357	29
063521070620	LES0556	30
063521074300	LES0556	30
063521101040	LES0090	33
063522230160	LES0346	34
063522300060	LES0199	38
063522310050	LES0319	42
063523620760	LES0471	35
063534696430	LEA0169	21
063534882060	LEA0692	25
063535550090	LEA0630	27

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

063733817010	LEA0867	13
30281020	LES0401	42
43354109	LEA0080	5
43356231	LEA0169	21
54022459	LEA0638	16
63207138	LES0404	38
63207159	LES0351	38
63216740	LES0401	42
63216741	LES0401	42
63216825	LES0351	38
63216826	LES0351	38
63216827	LES0351	38
63216831	LES0351	38
63216831	LES0352	40
63216873	LES0483	39
63216896	LES0483	39
63216898	LES0483	39
63217107	LES0471	35
63217158	LES0471	35
63217180	LES0478	34
63223204	LES0186	31
63223209	LES0186	31
63224600	LES0351	38
63280008	LES0090	33
63296847	LES0352	40
63296855	LES0352	40
63296857	LES0352	40
63296859	LES0352	40
63304510	LEA0597	25
63305226	LEA0593	7
63305226	LEA0594	7
63305226	LEA0599	8
63306000	LEA0320	20
63306000	LEA0590	21
63306020	LEA0590	21
63306050	LEA0320	20
63306050	LEA0590	21
63306060	LEA0320	20
63306060	LEA0590	21
63306070	LEA0320	20

63306070	LEA0590	21
63306079	LEA0320	20
63306079	LEA0590	21
63306089	LEA0320	20
63306089	LEA0590	21
63306099	LEA0320	20
63306300	LEA0320	20
63306301	LEA0320	20
63306301	LEA0590	21
63306320	LEA0320	20
63306350	LEA0320	20
63306350	LEA0590	21
63306360	LEA0320	20
63306360	LEA0590	21
63306370	LEA0320	20
63306370	LEA0590	21
63306379	LEA0320	20
63306379	LEA0590	21
63306380	LEA0320	20
63306389	LEA0320	20
63306389	LEA0590	21
63306399	LEA0320	20
63308300	LEA0320	20
63308310	LEA0320	20
63308320	LEA0320	20
63308330	LEA0320	20
63308340	LEA0320	20
63308350	LEA0320	20
63308360	LEA0320	20
63308360	LEA0590	21
63308370	LEA0320	20
63308380	LEA0320	20
63320013	LEA1148	8
63320025	LEA0320	20
63320025	LEA0590	21
63320037	LEA1148	8
63320049	LEA0593	7
63320049	LEA0594	7
63320049010	LEA0593	7
63320049010	LEA0594	7

63320060	LEA0320	20
63320111	LEA1291	9
63320114	LEA0320	20
63320124	LEA1148	8
63320137	LEA1148	8
63321011	LEA0593	7
63321011	LEA0594	7
63321011	LEA0599	8
63321011010	LEA0593	7
63321011010	LEA0594	7
63321011010	LEA0599	8
63321017	LEA0593	7
63321017	LEA0594	7
63321017	LEA0607	8
63321017010	LEA0593	7
63321017010	LEA0594	7
63321017010	LEA0607	8
63321019	LEA0593	7
63321019	LEA0594	7
63321019010	LEA0593	7
63321019010	LEA0594	7
63321021	LEA0593	7
63321021	LEA0594	7
63321021	LEA0599	8
63321021010	LEA0593	7
63321021010	LEA0594	7
63321021010	LEA0599	8
63321040	LEA1148	8
63321041	LEA0593	7
63321041	LEA0594	7
63321041	LEA0605	8
63321041010	LEA0593	7
63321041010	LEA0594	7
63321041010	LEA0605	8
63321042	LEA1148	8
63321046	LEA0320	20
63321046	LEA0590	21
63321047	LEA0320	20
63321047	LEA0590	21
63321048	LEA0320	20

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

63321048	LEA0590	21
63321049	LEA0320	20
63321049	LEA0590	21
63321050	LEA0320	20
63321050	LEA0590	21
63321052	LEA0320	20
63321055	LEA0320	20
63321079	LEA1148	8
63321095	LEA0613	1
63321096	LEA0593	7
63321096	LEA0594	7
63321104	LEA0320	20
63321112	LEA0593	7
63321112	LEA0594	7
63321112	LEA0599	8
63321112010	LEA0593	7
63321112010	LEA0594	7
63321112010	LEA0599	8
63321136	LEA1291	9
63321152	LEA0593	7
63321152	LEA0594	7
63321152	LEA0599	8
63321152010	LEA0593	7
63321152010	LEA0594	7
63321152010	LEA0599	8
63321154	LEA0599	8
63321190	LEA1291	9
63321321	LEA0638	16
63321358	LEA0638	16
63321424	LEA1148	8
63321428	LEA1148	8
63321458	LEA1148	8
63321502	LEA1148	8
63321503	LEA1148	8
63340004	LEA0638	16
63341321	LEA0638	16
63341358	LEA0638	16
63358020	LEA0584	7
63394551	LEA1148	8
63396560	LEA1148	8

63396566	LEA1148	8
63396567	LEA1148	8
63522235	LES0351	38
63534897	LEA0510	20
943217425	LES0478	34
943251485	LES0186	31
943252207010	LES0452	42
943252208010	LES0453	43
943303100	LEA0593	7
943308300	LEA0320	20
943320025	LEA0320	20
943356148	LEA0345	22
943356231	LEA0169	21
943356267010	LEA1137	28
943356502	LEA0073	3
943356701	LEA0073	3
943356964010	LEA1012	13
943357705	LEA0169	21
943357708	LEA0169	21
944280212300	LES0522	31
944390387910	LEA1012	13
MAN2010	LEA0169	21
MAN2014	LEA0692	25
MAN2019	LEA0510	20
MAN2091	LEA0630	27
MAN260	LEA0593	7
MAN260	LEA0594	7
MAN260	LEA0599	8
MAN261	LEA0320	20
MAN274	LEA0593	7
MAN274	LEA0594	7
MAN283	LEA1148	8
MAN284	LEA0593	7
MAN284	LEA0594	7
MAN284	LEA0605	8
MAN327	LEA0593	7
MAN327	LEA0594	7
MAN327	LEA0599	8
MAN349	LEA0593	7
MAN349	LEA0594	7

MAN349	LEA0599	8
MAN352	LEA0593	7
MAN352	LEA0594	7
MAN352	LEA0607	8
MAN354	LEA0593	7
MAN354	LEA0594	7
MAN354	LEA0599	8
MAN379	LEA0593	7
MAN379	LEA0594	7
MAN379	LEA0599	8
MAN674	LEA0638	16
MAN767	LEA0070	5
MAN770	LEA1148	8
MAN771	LEA0593	7
MAN771	LEA0594	7
MAN795	LEA1148	8
MAN831	LEA0638	16
MAN946	LEA1148	8
MAR104	LEA0038	5
MAR119	LEA0038	5
MAR129	LEA0038	5
MAR130	LEA0556	6
MAR151	LEA0556	6
MAR485	LEA0073	3
MAR5026	LEA1012	13
MAR592	LEA0073	3
MAR638	LEA0169	21
MAR7109	LEA0080	5
MAR845	LEA0169	21
MAR874	LEA0076	3
MAR898	LEA0510	20
MRA38791	LEA1012	13
MRA90317	LEA0826	18
MSN2010	LES0357	29
MSN2014	LES0556	30
MSN2018	LES0556	30
MSN2035	LES0346	34
MSN2036	LES0351	38
MSN2038	LES0199	38
MSN2040	LES0483	39

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

MSN2043	LES0319	42
MSN2051	LES0471	35
MSN2086	LES0090	33
MSN219	LES0352	40
MSN224	LES0483	39
MSN232	LES0471	35
MSN245	LES0404	38
MSN521	LES0401	42
MSN8008	LES0090	33
MSR243	LES0478	34
MSR700	LES0452	42
MSR701	LES0453	43
MT67C	LES0401	42
MT68AA	LES0351	38
MT68AB	LES0351	38
MT68AC	LES0351	38
MT68AD	LES0351	38
MT68L	LES0483	39
MT68LA	LES0483	39
MT68LB	LES0483	39
MT68LC	LES0483	39
MT68T	LES0472	39
MT71A	LES0351	38
MT71AA	LES0351	38
MT71AB	LES0351	38
MT71G	LES0471	35
MT71GB	LES0471	35
MT74A	LES0478	34

MAHLE

MG110	LEA0584	7
MG116	LEA0626	16
MG124	LEA0500	1
MG127	LEA0599	8
MG130	LEA0477	23
MG135	LEA0626	16
MG149	LEA0587	9
MG156	LEA0605	8
MG159	LEA0437	10
MG17	LEA0345	22
MG171	LEA0967	2

MG179	LEA1279	27
MG183	LEA0169	21
MG189	LEA0594	7
MG191	LEA0610	4
MG203	LEA1134	21
MG209	LEA0502	6
MG21	LEA1291	9
MG217	LEA0075	9
MG233	LEA0619	14
MG238	LEA0556	6
MG24	LEA0893	15
MG245	LEA0532	24
MG249	LEA0437	10
MG258	LEA0599	8
MG268	LEA0888	17
MG270	LEA0920	16
MG279	LEA0080	5
MG282	LEA1062	2
MG292	LEA0896	15
MG3	LEA1202	19
MG307	LEA0484	24
MG309	LEA1207	16
MG313	LEA0886	17
MG319	LEA0169	21
MG321	LEA0481	12
MG322	LEA0772	25
MG329	LEA0867	13
MG333	LEA1137	28
MG335	LEA0512	24
MG337	LEA0882	25
MG342	LEA0897	15
MG343	LEA0867	13
MG344	LEA0868	13
MG358	LEA0071	2
MG361	LEA0607	8
MG369	LEA0320	20
MG369	LEA0590	21
MG382	LEA1137	28
MG386	LEA0483	24
MG387	LEA1012	13

MG39	LEA0898	18
MG396	LEA0073	3
MG399	LEA0597	25
MG4	LEA0873	17
MG423	LEA0599	8
MG444	LEA0345	22
MG445	LEA0345	22
MG477	LEA0626	16
MG482	LEA0903	12
MG483	LEA0887	15
MG499	LEA0478	12
MG50	LEA0437	10
MG500	LEA0461	26
MG504	LEA0610	4
MG509	LEA1173	26
MG511	LEA1175	4
MG515	LEA1148	8
MG517	LEA0864	2
MG522	LEA0449	9
MG528	LEA0500	1
MG552	LEA0638	16
MG554	LEA0526	20
MG58	LEA0869	14
MG581	LEA0891	17
MG596	LEA0967	2
MG603	LEA0902	10
MG604	LEA0586	7
MG626	LEA0502	6
MG627	LEA0510	20
MG636	LEA0898	18
MG639	LEA0898	18
MG653	LEA0502	6
MG668	LEA0437	10
MG672	LEA0867	13
MG681	LEA0887	15
MG710	LEA0898	18
MG711	LEA0626	16
MG712	LEA0626	16
MG718	LEA0502	6
MG77	LEA1206	13

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

MG800	LEA0630	27
MG84	LEA0692	25
MG921	LEA0169	21
MS1052	LES0452	42
MS108	LES0199	38
MS119	LES0696	40
MS137	LES0477	35
MS148	LES0479	40
MS165	LES0578	43
MS186	LES0401	42
MS19	LES0596	43
MS190	LES0471	35
MS192	LES0351	38
MS195	LES0351	38
MS211	LES0346	34
MS232	LES0319	42
MS242	LES0202	44
MS265	LES0452	42
MS27	LES0346	34
MS278	LES0483	39
MS28	LES0346	34
MS300	LES0404	38
MS301	LES0478	34
MS308	LES0472	39
MS313	LES0471	35
MS325	LES0453	43
MS359	LES0357	29
MS362	LES0626	44
MS369	LES0682	44
MS378	LES0090	33
MS388	LES0351	38
MS392	LES0478	34
MS398	LES0697	41
MS399	LES0393	39
MS402	LES0695	40
MS41	LES0237	39
MS438	LES0477	35
MS446	LES0199	38
MS455	LES0556	30
MS56	LES0090	33

MS58	LES0404	38
MS613	LES0319	42
MS627	LES0578	43
MS66	LES0319	42
MS677	LES0391	38
MS71	LES0626	44
MS75	LES0313	45
MS99	LES0581	43
72735012	LEA1302	14
MG13	LEA1302	14
MG414	LEA1303	14

MANDO / VALEO KOREA

A000B0331	LEA0419	3
AC155603	LEA0419	3
AC155604	LEA0419	3
AC155616	LEA0199	3
AC165610	LEA0417	6
AC165617	LEA0416	5
AC165618	LEA0418	6
AR150BA	LEA0419	3
M59819	LEA0418	6
S0001250600	LES0195	34
TA000A37802	LEA1012	13
TA000B0341	LEA0447	4
TA000B23301	LEA0416	5
TM000A22801	LES0113	34
TM000A24301	LES0249	32

MARLIN

63303100	LEA0593	7
63303100	LEA0594	7
63303100	LEA0599	8
63303110	LEA0593	7
63303110	LEA0594	7
63303110	LEA0599	8
63303140	LEA0593	7
63303140	LEA0594	7
63303140	LEA0599	8
63303191	LEA0593	7
63303191	LEA0594	7
63303191	LEA0599	8

63303192	LEA0593	7
63303192	LEA0594	7
63303192	LEA0599	8
63303290	LEA0593	7
63303290	LEA0594	7
63303290	LEA0599	8
63303380	LEA0593	7
63303380	LEA0594	7
63303380	LEA0599	8
63303500	LEA0593	7
63303500	LEA0594	7
63303500	LEA0599	8
63303780	LEA0593	7
63303780	LEA0594	7
63303780	LEA0599	8
63305000	LEA0593	7
63305000	LEA0594	7
63305000	LEA0599	8
63305020	LEA0593	7
63305020	LEA0594	7
63305020	LEA0599	8
63305101	LEA0593	7
63305101	LEA0594	7
63305101	LEA0599	8
63305102	LEA0593	7
63305102	LEA0594	7
63305102	LEA0599	8
63305131	LEA0593	7
63305131	LEA0594	7
63305131	LEA0599	8
63305206	LEA0605	8
63305226	LEA0605	8
63305300	LEA0593	7
63305300	LEA0594	7
63305300	LEA0599	8
63305310	LEA0593	7
63305310	LEA0594	7
63305310	LEA0599	8
63305400	LEA0593	7
63305400	LEA0594	7

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

63305400	LEA0599	8	63305621	LEA0593	7	63307405	LEA0593	7
63305401	LEA0593	7	63305621	LEA0594	7	63307405	LEA0594	7
63305401	LEA0594	7	63305621	LEA0599	8	63307405	LEA0599	8
63305401	LEA0599	8	63305802	LEA0605	8	63307407	LEA0593	7
63305403	LEA0593	7	63305822	LEA0599	8	63307407	LEA0594	7
63305403	LEA0594	7	63305822	LEA0605	8	63307407	LEA0599	8
63305403	LEA0599	8	63305842	LEA0599	8	63307409	LEA0593	7
63305404	LEA0593	7	63305842	LEA0605	8	63307409	LEA0594	7
63305404	LEA0594	7	63305862	LEA0599	8	63307409	LEA0599	8
63305404	LEA0599	8	63305862	LEA0605	8	63307420	LEA0593	7
63305405	LEA0593	7	63307101	LEA0593	7	63307420	LEA0594	7
63305405	LEA0594	7	63307101	LEA0594	7	63307420	LEA0599	8
63305405	LEA0599	8	63307101	LEA0599	8	63307427	LEA0593	7
63305406	LEA0593	7	63307105	LEA0593	7	63307427	LEA0594	7
63305406	LEA0594	7	63307105	LEA0594	7	63307427	LEA0599	8
63305406	LEA0599	8	63307105	LEA0599	8	63307429	LEA0593	7
63305420	LEA0593	7	63307107	LEA0593	7	63307429	LEA0594	7
63305420	LEA0594	7	63307107	LEA0594	7	63307429	LEA0599	8
63305420	LEA0599	8	63307125	LEA0593	7	63307431	LEA0593	7
63305425	LEA0593	7	63307125	LEA0594	7	63307431	LEA0594	7
63305425	LEA0594	7	63307125	LEA0599	8	63307431	LEA0599	8
63305425	LEA0599	8	63307127	LEA0593	7	63307450	LEA0593	7
63305426	LEA0593	7	63307127	LEA0594	7	63307450	LEA0594	7
63305426	LEA0594	7	63307131	LEA0593	7	63307450	LEA0599	8
63305426	LEA0599	8	63307131	LEA0594	7	63307452	LEA0593	7
63305431	LEA0593	7	63307131	LEA0599	8	63307452	LEA0594	7
63305431	LEA0594	7	63307206	LEA0599	8	63307460	LEA0593	7
63305431	LEA0599	8	63307206	LEA0605	8	63307460	LEA0594	7
63305450	LEA0593	7	63307227	LEA0593	7	63307460	LEA0599	8
63305450	LEA0594	7	63307227	LEA0594	7	63307470	LEA0593	7
63305450	LEA0599	8	63307227	LEA0599	8	63307470	LEA0594	7
63305506	LEA0599	8	63307246	LEA0605	8	63307470	LEA0599	8
63305506	LEA0605	8	63307256	LEA0599	8	63307506	LEA0599	8
63305520	LEA0593	7	63307256	LEA0605	8	63307506	LEA0605	8
63305520	LEA0594	7	63307401	LEA0593	7	63307526	LEA0599	8
63305520	LEA0599	8	63307401	LEA0594	7	63307526	LEA0605	8
63305526	LEA0599	8	63307401	LEA0599	8	63307802	LEA0599	8
63305526	LEA0605	8	63307403	LEA0593	7	63307802	LEA0605	8
63305536	LEA0599	8	63307403	LEA0594	7	63307804	LEA0593	7
63305536	LEA0605	8	63307403	LEA0599	8	63307804	LEA0594	7

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

63307804	LEA0599	8
63307822	LEA0599	8
63307822	LEA0605	8
63307824	LEA0593	7
63307824	LEA0594	7
63307824	LEA0599	8
63307832	LEA0599	8
63307832	LEA0605	8
63307862	LEA0599	8
63307862	LEA0605	8
63320003	LEA0593	7
63320003	LEA0594	7
63320003	LEA0599	8
63320004	LEA0593	7
63320004	LEA0594	7
63320004	LEA0599	8
63320005	LEA0593	7
63320005	LEA0594	7
63320005	LEA0599	8
63320006	LEA0593	7
63320006	LEA0594	7
63320006	LEA0599	8
63320007	LEA0593	7
63320007	LEA0594	7
63320007	LEA0599	8
63320008	LEA0593	7
63320008	LEA0594	7
63320008	LEA0599	8
63320013	LEA0593	7
63320013	LEA0594	7
63320013	LEA0599	8
63320015	LEA0599	8
63320015	LEA0605	8
63320017	LEA0593	7
63320017	LEA0594	7
63320017	LEA0599	8
63320018	LEA0593	7
63320018	LEA0594	7
63320018	LEA0599	8
63320021	LEA0593	7

63320021	LEA0594	7
63320021	LEA0605	8
63320023	LEA0599	8
63320023	LEA0605	8
63320024	LEA0593	7
63320024	LEA0594	7
63320024	LEA0599	8
63320026	LEA0593	7
63320026	LEA0594	7
63320028	LEA0593	7
63320028	LEA0594	7
63320028	LEA0599	8
63320031	LEA0593	7
63320031	LEA0594	7
63320031	LEA0599	8
63320032	LEA0593	7
63320032	LEA0594	7
63320032	LEA0599	8
63320035	LEA0593	7
63320035	LEA0594	7
63320035	LEA0599	8
63320042	LEA0593	7
63320042	LEA0594	7
63320044	LEA0593	7
63320044	LEA0594	7
63320044	LEA0599	8
63320046	LEA0593	7
63320046	LEA0594	7
63320047	LEA0593	7
63320047	LEA0594	7
63320047	LEA0599	8
63320049	LEA0599	8
63320049	LEA0605	8
63320053	LEA0593	7
63320053	LEA0594	7
63320053	LEA0599	8
63321002	LEA0593	7
63321002	LEA0594	7
63321002	LEA0599	8
63321003	LEA0593	7

63321003	LEA0594	7
63321003	LEA0599	8
63321006	LEA0593	7
63321006	LEA0594	7
63321006	LEA0599	8
63321007	LEA0593	7
63321007	LEA0594	7
63321007	LEA0599	8
63321008	LEA0593	7
63321008	LEA0594	7
63321008	LEA0599	8
63321009	LEA0593	7
63321009	LEA0594	7
63321009	LEA0599	8
63321010	LEA0593	7
63321010	LEA0594	7
63321012	LEA0593	7
63321012	LEA0594	7
63321017	LEA0593	7
63321017	LEA0594	7
63321017	LEA0599	8
63321019	LEA0599	8
63321019	LEA0605	8
63321020	LEA0599	8
63321020	LEA0605	8
63321021	LEA0599	8
63321021	LEA0605	8
63321024	LEA0593	7
63321024	LEA0594	7
63321024	LEA0599	8
63321025	LEA0593	7
63321025	LEA0594	7
63321025	LEA0599	8
63321032	LEA0599	8
63321032	LEA0605	8
63321035	LEA0605	8
63321036	LEA0605	8
63321037	LEA0605	8
63321039	LEA0593	7
63321039	LEA0594	7

www.lucaselektrik.com

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

63321039	LEA0599	8
63321041	LEA0599	8
63321041	LEA0605	8
63321042	LEA0605	8
63321056	LEA0593	7
63321056	LEA0594	7
63321058	LEA0593	7
63321058	LEA0594	7
63321058	LEA0599	8
63321061	LEA0593	7
63321061	LEA0594	7
63321061	LEA0599	8
63321071	LEA0593	7
63321071	LEA0594	7
63321071	LEA0599	8
63321077	LEA0593	7
63321077	LEA0594	7
63321077	LEA0599	8
63321084	LEA0593	7
63321084	LEA0594	7
63321086	LEA0593	7
63321086	LEA0594	7
63321086	LEA0599	8
63321088	LEA0593	7
63321088	LEA0594	7
63321096	LEA0593	7
63321096	LEA0594	7
63321154	LEA0593	7
63321154	LEA0594	7
63321154	LEA0599	8
943320022	LEA0593	7
943320022	LEA0594	7
943320022	LEA0599	8
943321003	LEA0593	7
943321003	LEA0594	7
943321003	LEA0599	8
943321006	LEA0593	7
943321006	LEA0594	7
943321006	LEA0599	8
943321011	LEA0593	7

943321011	LEA0594	7
943321011	LEA0599	8
943321017	LEA0593	7
943321017	LEA0594	7
943321017	LEA0599	8
943321019	LEA0599	8
943321019	LEA0605	8
943321020	LEA0599	8
943321020	LEA0605	8
943321025	LEA0593	7
943321025	LEA0594	7
943321025	LEA0599	8
943321037	LEA0599	8
943321037	LEA0605	8
943321041	LEA0599	8
943321041	LEA0605	8
943321042	LEA0599	8
943321042	LEA0605	8
943321056	LEA0593	7
943321056	LEA0594	7
943321077	LEA0593	7
943321077	LEA0594	7
943321077	LEA0599	8
943321084	LEA0593	7
943321084	LEA0594	7
943321088	LEA0593	7
943321088	LEA0594	7
943356305	LEA0605	8
943356353	LEA0599	8
943356353	LEA0605	8
MERCURY MARINE		
12449	LEA0419	3
19685	LEA0419	3
805447T	LEA0417	6
805884	LEA0417	6
805884P	LEA0417	6
805884T	LEA0417	6
806964A2	LES0249	32
806964A3	LES0249	32
807652	LEA0199	3

807653	LEA0416	5
807653T	LEA0416	5
807907	LES0249	32
807907A	LES0249	32
812428A3	LES0249	32
812604A2	LES0249	32
817119	LEA0419	3
817119-1	LEA0419	3
817119-2	LEA0419	3
817119A1	LEA0419	3
817119A4	LEA0419	3
82230A2	LES0249	32
822330A2	LES0249	32
857652T	LEA0199	3
92497A3	LEA0419	3
98555	LEA0419	3
mitsubishi		
A003TA0591	LEA1012	13
A004T02891	LEA1012	13
A004TA8391	LEA1030	27
A004TA8691	LEA1030	27
A2T37691	LEA1012	13
A3TA0591	LEA1012	13
A4T02891	LEA1012	13
A4TA8391	LEA1030	27
A4TA8691	LEA1030	27
A4TA8691AM	LEA1030	27
M2T47281	LES0280	29
MOTORCRAFT		
ESA234	LES0090	33
ESA247	LES0090	33
MOTOROLA		
10-127	LEA0478	12
510-289	LEA0169	21
510-804	LEA0477	23
510-834	LEA0478	12
510-845	LEA0439	22
510-860	LEA0439	22
510-864	LEA0439	22
9AL3955G	LEA0320	20

REFERENCE NO/LUCASELEKTRIK NO/PAGE

9AR2712P	LEA0478	12
9AR2738P	LEA0478	12
9AR2740P	LEA0478	12
9AR2741P	LEA0478	12
9AR2775P	LEA0869	14
9AR2775P	LEA1206	13
9AR2919P	LEA0584	7
9AR3668G	LEA0169	21
9AR3868G	LEA0169	21
9AR6000	LEA0439	22
9AR6000G	LEA0439	22
9AR6025K	LEA0169	21

MWM

605710100109	LEA0076	3
605710100109	LEA0449	9
605710100109	LEA0500	1
605710100112	LEA0510	20
605710100130	LEA0864	2
605710100136	LEA0076	3
605710100136	LEA0449	9
605710100136	LEA0500	1
605710100146	LEA0510	20
605710100149	LEA0586	7
605710100161	LEA0586	7
605720100049	LES0471	35
605720100050	LES0471	35
605720100093	LES0471	35

NANNI INDUSTRIES

300100	LEA0477	23
48200932	LEA0477	23
48200932	LEA0478	12
48201108	LEA1173	26
48201109	LEA0891	17
48201149	LEA0902	10
48201171	LEA0891	17
48201174	LEA1173	26
48201303	LEA0891	17
970307522	LEA0478	12

PAL MAGNETON

443113515693	LEA0586	7
--------------	---------	---

REFERENCE NO/LUCASELEKTRIK NO/PAGE

9144744	LES0351	38
9515010	LEA0586	7
9515110	LEA0619	14
9515112	LEA0619	14
9516693	LEA0586	7

PERKINS

185046360	LEA0556	6
185086370	LES0280	29
185086540	LES0280	29
185086820	LES0280	29
26874	LEA0628	28
28171A166	LEA0070	5
2871723	LEA1182	26
2871735	LEA1182	26
2871740	LEA1182	26
2871A002	LEA1182	26
2871A003	LEA1182	26
2871A004	LEA1182	26
2871A145	LEA0437	10
2871A148	LEA0556	6
2871A152	LEA0437	10
2871A157	LEA0437	10
2871A163	LEA0556	6
2871A453	LEA1206	13
2871A602	LEA0437	10
2871A682	LEA1182	26
2873347R	LES0682	44
2873K624	LES0393	39
2873K625	LES0393	39
2873K626	LES0393	39
2873K634	LES0393	39
3586849	LES0393	39
36961	LEA0896	15
3873K627	LES0393	39
N39876	LEA0897	15
OD16717/2	LEA1182	26
OD167172	LEA1182	26
OD174991	LEA1182	26
OD17499-1	LEA1182	26
OD174992	LEA1182	26

REFERENCE NO/LUCASELEKTRIK NO/PAGE

OD17499-2	LEA1182	26
OD174993	LEA1182	26
OD17499-3	LEA1182	26
OD174994	LEA1182	26
OD17499-4	LEA1182	26
OD182651	LEA1182	26
OD18265-1	LEA1182	26
OD18580	LEA1182	26
OD195281	LEA1182	26
OD19528-1	LEA1182	26
OD196021	LEA1182	26
OD20766	LEA1182	26
OD20767	LEA1182	26
OD20801	LEA1182	26
OD208222	LEA1182	26
OE52773	LEA1182	26
T410865	LES0393	39

PRESTOLITE

110258	LEA0628	28
110258A	LEA0628	28
1263020	LEA1182	26
1263B317	LEA1182	26
1266450	LEA1182	26
1266460	LEA1182	26
1266500	LEA1182	26
1266530	LEA1182	26
1266580	LEA1182	26
1266690	LEA1182	26
1266720	LEA1182	26
1268410	LEA1182	26
1268430	LEA1182	26
1268450	LEA1182	26
1268470	LEA1182	26
1268500M	LEA1182	26
1268520	LEA1182	26
1268530M	LEA1182	26
1268560	LEA1182	26
1268580	LEA1182	26
1268590	LEA1182	26
1268590C	LEA1182	26

REFERENCE NO/LUCASELEKTRIK NO/PAGE

1268590M	LEA1182	26
1268600M	LEA1182	26
1268610	LEA1182	26
1268650M	LEA1182	26
1268650MC	LEA1182	26
1268660	LEA1182	26
1268720	LEA1182	26
1268730	LEA1182	26
1269730M	LEA1182	26
1277700	LEA1137	28
20100527	LEA0070	5
20100975	LEA0610	4
20100983	LEA0586	7
20110294	LEA0920	16
20130133	LEA0449	9
20130134	LEA0526	20
20130136	LEA0619	14
20130207	LEA0613	1
20130210	LEA0626	16
20130211	LEA0081	21
20140115	LEA0070	5
20150113	LEA0478	12
20150114	LEA0477	23
20500555	LES0032	32
20500850	LES0351	38
20513040	LES0179	30
20513059	LES0281	30
20540106	LES0477	35
35258940	LES0479	40
35259620	LES0479	40
35261180	LES0249	32
66021126M	LEA0441	11
66021151M	LEA0869	14
66021153M	LEA0445	11
66021174M	LEA0442	22
66021411	LEA0584	7
66021414	LEA0075	9
66021507	LEA1182	26
66021535	LEA0437	10
66021587	LEA0437	10

REFERENCE NO/LUCASELEKTRIK NO/PAGE

66021588	LEA0438	11
66021590M	LEA0441	11
66021593	LEA0439	22
66021594	LEA0440	22
66021623M	LEA0442	22
854477	LEA1182	26
854494	LEA1182	26
857472	LES0452	42
857472GB	LES0452	42
857594Z	LEA1182	26
857606	LEA1182	26
857612	LEA1182	26
857621	LEA1182	26
857621Z	LEA1182	26
857626	LEA1182	26
857626Z	LEA1182	26
857633	LEA1182	26
857645Z	LEA1182	26
857722Z	LEA1182	26
858085	LEA1182	26
858085Z	LEA1182	26
858320	LES0401	42
858619Z	LEA1182	26
858693	LEA1182	26
858693Z	LEA1182	26
858882	LEA0169	21
859327	LEA1182	26
859327Z	LEA1182	26
859437	LEA1182	26
859437Z	LEA1182	26
859438	LEA1182	26
859440	LEA1182	26
859440Z	LEA1182	26
859544	LEA1182	26
859544Z	LEA1182	26
859605Z	LEA1182	26
860049	LEA1182	26
860052	LEA1182	26
860715	LES0393	39
861038	LES0453	43

REFERENCE NO/LUCASELEKTRIK NO/PAGE

861094	LES0346	34
861343	LEA1030	27
861355	LEA0526	20
880623Z	LEA1182	26
880624	LEA1182	26
880624Z	LEA1182	26
880626	LEA1182	26
880626Z	LEA1182	26
880627	LEA1182	26
880627Z	LEA1182	26
880628	LEA1182	26
880628Z	LEA1182	26
880629	LEA1182	26
880629Z	LEA1182	26
880648Z	LEA1182	26
880652Z	LEA1182	26
8SA2004R	LEA0478	12
8SC3157V	LEA0628	28
A55242	LEA1182	26
A552430	LEA1182	26
A552437	LEA1182	26
A552440	LEA1182	26
A552446	LEA1182	26
A552456	LEA1182	26
A552458	LEA1182	26
AC5242	LEA1182	26
AC5RS24	LEA1182	26
LNA55240	LEA1182	26
LNA55241	LEA1182	26
LNA552412	LEA1182	26
LNA55242	LEA1182	26
LNA55243	LEA1182	26
LNA55247	LEA1182	26
MS1-401A	LES0450	45
PBNA1134	LEA0502	6
S1097R	LES0249	32
S1101R	LES0249	32
S5012L	LES0578	43
RUGGERINI		
01451	LEA1175	4

REFERENCE NO/LUCASELEKTRIK NO/PAGE

563-08	LES0478	34
563-50	LES0357	29
563-56	LES0478	34

SABRE ENGINES

35361	LEA0437	10
35362	LEA0439	22
36962	LEA0484	24
40082	LEA0437	10
N37636	LES0696	40
N37637	LES0581	43

SAME

01180928	LES0199	38
207020002	LES0404	38
294390200	LEA0076	3
294390200	LEA0500	1
294390200	LEA0502	6
294391000	LEA0500	1
294392200	LEA0593	7
294392200	LEA0594	7
294393200	LEA1148	8
294393700	LEA1148	8
294394200	LEA1148	8
294395500	LEA1148	8
294395700	LEA1148	8
294396100	LEA1202	19
294396500	LEA1202	19
296190300	LES0404	38
90021177	LEA1202	19

SISU DIESEL

835339422	LEA1279	27
836659645	LEA0437	10
836664029	LES0697	41
836664355	LES0596	43
836664356	LEA1279	27
836674650	LES0596	43
V836666722	LEA1279	27

SOLE DIESEL

13817100	LEA0441	11
----------	---------	----

REFERENCE NO/LUCASELEKTRIK NO/PAGE

STEYR

1420000901951	LEA0619	14
1620000902951	LEA0619	14
31100090048	LEA0502	6
40800090007	LES0404	38
61000090072	LEA0586	7
61200090007	LEA0502	6
614S090001	LEA0510	20

TORPEDO

0212803	LEA0510	20
0220850	LEA0510	20

UNIPART

GEU2034	LEA0073	3
GEU2065	LEA0073	3
GEU2109	LEA0556	6
GEU2114	LEA0038	5
GEU2115	LEA0556	6
GXE2034	LEA0073	3
GXE2065	LEA0073	3
GXE2114	LEA0038	5
GXE2115	LEA0556	6
GXE2119	LEA0038	5

VALEO

100605	LEA0478	12
102334	LEA0169	21
103142	LEA0478	12
106606	LEA0478	12
1099861	LEA0345	22
184202	LES0237	39
2102334	LEA0169	21
2518039	LEA0478	12
2518064	LEA0477	23
2522976	LEA0586	7
2541145	LEA0169	21
2541191	LEA0478	12
2541233	LEA0593	7
2541233	LEA0594	7
2541233	LEA0599	8
2541451	LEA0869	14
2541665	LEA1012	13

REFERENCE NO/LUCASELEKTRIK NO/PAGE

2541665B	LEA1012	13
2541665C	LEA1012	13
2541740B	LEA1012	13
2541828	LEA0495	26
2541951	LEA1012	13
2542418	LEA1012	13
2542418A	LEA1012	13
2542514	LEA0461	26
2542514A	LEA0461	26
2542672	LEA0826	18
2625045	LEA0073	3
2625641	LEA0073	3
2917750	LEA0478	12
2927120	LEA0478	12
2927750	LEA0478	12
2937130	LEA0477	23
2939590	LEA0439	22
2940353	LEA0073	3
2940526	LEA0586	7
2960000	LEA0439	22
432746	LEA0599	8
432864	LEA0584	7
432865	LEA0038	5
432868	LEA1148	8
432988	LEA0076	3
432989	LEA0586	7
432990	LEA0320	20
432990	LEA0590	21
433002	LEA0586	7
433117	LEA0593	7
433188	LEA1012	13
433189	LEA1012	13
433190	LEA1012	13
433415	LEA0556	6
433476	LEA0076	3
436109	LEA1148	8
436111	LEA0593	7
436111	LEA0594	7
436111	LEA0599	8
436112	LEA0593	7

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

436112	LEA0594	7
436112	LEA0599	8
436114	LEA0599	8
436117	LEA0593	7
436135	LEA0586	7
436149	LEA0073	3
436150	LEA0073	3
436151	LEA0073	3
436237	LEA0593	7
436237	LEA0594	7
436238	LEA0593	7
436243	LEA0593	7
436243	LEA0594	7
436243	LEA0599	8
436243	LEA0607	8
436261	LEA1012	13
436265	LEA0500	1
436269	LEA0586	7
436297	LEA0075	9
436297	LEA0593	7
436346	LEA1012	13
436355	LEA0169	21
436378	LEA0478	12
436412	LEA0169	21
436414	LEA0586	7
436416	LEA0320	20
436416	LEA0590	21
436419	LEA0510	20
436420	LEA0510	20
436436	LEA0169	21
436638	LEA0478	12
436639	LEA0495	26
436676	LEA0478	12
437352	LEA0461	26
437825	LEA0638	16
438151	LES0522	31
438483	LES0090	33
439067	LEA0478	12
439068	LEA0495	26
439181	LEA0478	12

439189	LEA0477	23
439231	LEA0461	26
439314	LEA0496	27
439487	LEA0826	18
439567	LEA0826	18
440047	LEA0867	13
455533	LES0452	42
455536	LES0453	43
455537	LES0237	39
455677	LES0186	31
455681	LES0186	31
455725	LES0090	33
455896	LES0090	33
458166	LES0522	31
510427	LEA0510	20
510803	LEA0478	12
510804	LEA0477	23
510816	LEA0478	12
510818	LEA0478	12
510819	LEA0478	12
510822	LEA0437	10
510823	LEA0437	10
510834	LEA0478	12
510839	LEA0869	14
510845	LEA0439	22
510859	LEA0437	10
510860	LEA0439	22
510864	LEA0439	22
514014	LEA0593	7
514014	LEA0594	7
514014	LEA0599	8
518039	LEA0478	12
592601	LEA0477	23
592601	LEA0495	26
592772	LEA0478	12
70230202	LEA0478	12
71543002	LEA0477	23
99755	LEA0169	21
9AR2951L	LEA0593	7
9AR2951L	LEA0594	7

9AR3713G	LEA0477	23
9AR3855	LEA0439	22
A11VI57	LEA1012	13
A13E23	LEA0593	7
A13E23	LEA0594	7
A13E23	LEA0599	8
A13N143M	LEA0477	23
A13N147	LEA1206	13
A13N147M	LEA1206	13
A13N148M	LEA0478	12
A13N149M	LEA0478	12
A13N152M	LEA0477	23
A13N186M	LEA1206	13
A13N1M	LEA0869	14
A13N1M	LEA1206	13
A13N234	LEA1206	13
A13N259	LEA1206	13
A13N259M	LEA1206	13
A13N270	LEA0477	23
A13N285M	LEA1206	13
A13N2M	LEA1206	13
A13N36M	LEA0477	23
A13N42	LEA0599	8
A13N57M	LEA0869	14
A13N57M	LEA1206	13
A13VI191	LEA1012	13
A13VI281	LEA1012	13
A13VI51	LEA1012	13
A13VI71	LEA1012	13
A13VI81	LEA1012	13
A13VI88	LEA1012	13
A14N100	LEA0345	22
A14N112M	LEA0477	23
A14N112M	LEA0495	26
A14N118M	LEA0495	26
A14N122M	LEA0477	23
A14N122M	LEA0495	26
A14N137M	LEA0477	23
A14N183M	LEA0461	26
A14N200M	LEA0495	26

REFERENCE NO/LUCASELEKTRIK NO/PAGE

A14N207M	LEA0496	27
A14N208M	LEA0461	26
A14N47M	LEA0495	26
A14N81M	LEA0495	26
D6RA22	LES0556	30
D6RA52	LES0556	30
D7G4	LES0522	31
D7GP008	LES0522	31
D7R64	LES0090	33
D9R116	LES0237	39
D9R144	LES0237	39
NA066	LEA0584	7
NA135	LEA0320	20
NA386	LEA0320	20
NA387	LEA0478	12
NA388	LEA0478	12
NA508	LEA0461	26
NA583	LEA0495	26
NA586	LEA0478	12
ND147	LES0237	39
SG9MA144	LEA0073	3
SG9MA267	LEA0073	3
TG15C012	LEA0826	18
TG15C064	LEA0826	18

VALEO (Motorola)

8SC3009Z	LEA0628	28
8SC3009ZA	LEA0628	28
9AL6011G	LEA0510	20
9AR2712P	LEA0478	12
9AR2734P	LEA0437	10
9AR2738P	LEA0478	12
9AR2740P	LEA0478	12
9AR2744P	LEA0437	10
9AR2746P	LEA0437	10
9AR2747P	LEA0437	10
9AR2775	LEA0478	12
9AR2775F	LEA0478	12
9AR2799G	LEA0500	1
9AR2854P	LEA0437	10
9AR2904K	LEA0073	3

REFERENCE NO/LUCASELEKTRIK NO/PAGE

9AR2904L	LEA0073	3
9AR2958P	LEA0437	10
9AR3855G	LEA0439	22
9AR3959G	LEA0439	22
9AR6000G	LEA0439	22
9AR6012G	LEA0510	20

VALEO (Paris Prone)

A13N11	LEA0169	21
A13R214	LEA0169	21
A14N133	LEA0169	21
A14N39	LEA0169	21
A14R33	LEA0169	21

VETUS DEN OUDEN

STM8652	LES0199	38
STM8663	LEA1134	21

VM MOTORI

38522236F	LEA0599	8
-----------	---------	---

VOLVO

1089861	LEA0345	22
1096757	LEA0461	26
11170011	LEA0461	26
11170134	LEA0630	27
11170321	LEA0630	27
1359119	LES0237	39
1367049	LES0237	39
1542195	LES0237	39
1545417	LES0237	39
1607361	LEA0345	22
1607362	LEA0345	22
1676822	LES0453	43
20409228	LEA0630	27
20849349	LEA0630	27
21067513	LES0453	43
21289223	LEA1030	27
21429783	LEA0630	27
21477589	LES0453	43
3032961	LEA1137	28
3173821	LEA0461	26
3581774	LES0237	39
5003009	LES0453	42

REFERENCE NO/LUCASELEKTRIK NO/PAGE

3595446	LES0384	45
36050262	LEA0670	18
3803118	LES0237	39
3803200	LES0237	39
3803260-3	LEA0869	14
3803260-3	LEA1206	13
3803386	LES0237	39
3803639	LEA0630	27
3803645	LEA0670	18
3854750	LES0249	32
3856003	LES0249	32
3862308	LES0249	32
3963143	LEA0461	26
3978044	LES0453	43
3986428	LEA0461	26
465604	LES0453	43
466772	LES0453	43
4881598	LES0453	43
5001759	LES0237	39
5001784	LES0453	43
5003009	LES0453	43
5003090	LEA0345	22
5003349	LEA0345	22
5003448	LEA0345	22
6205473	LEA0586	7
6779261	LEA0345	22
707112	LES0202	44
8112416	LEA0461	26
8112614	LEA0461	26
8113860	LES0453	43
8113911	LEA0345	22
8144401	LEA0461	26
8156816	LEA0461	26
8346256	LEA0478	12
8413783	LEA0478	12
841762	LEA0478	12
841765	LEA0478	12
8417669	LEA0478	12
842765	LEA0478	12
845940	LEA0495	26

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

REFERENCE NO/LUCASELEKTRIK NO/PAGE

8497489	LEA0628	28
85000446	LES0453	43
85000507	LEA0461	26
85000626	LEA0630	27
85003104	LEA1137	28
858838	LEA0478	12
8588386	LEA0478	12
858839	LEA0478	12
8588394	LEA0478	12
859252	LES0237	39
8602275	LEA0670	18
8602343	LEA0670	18
8602629	LEA0670	18
8602710	LEA0670	18
8602712-0	LEA0670	18
8602712-5	LEA0670	18
8622786	LEA0670	18
8637847	LEA0670	18
8637848	LEA0670	18
8676496	LEA0670	18
8676498	LEA0670	18
8720187	LEA0478	12
872019	LEA1206	13
872021	LEA0345	22
872021	LEA0495	26
8722357	LEA0869	14
8722357	LEA1206	13
872757	LEA0495	26
873757	LEA0345	22
874468	LES0384	45
9011063163	LEA0495	26
9011707112	LES0202	44
9489312	LEA0670	18
9519360	LEA1137	28
9520621	LEA1137	28
VOE3173821	LEA0461	26
VOE9014371018	LEA0495	26
VOLVO - PENTA		
21615917	LEA0526	20
21805948	LEA0868	13

3803146-4	LEA0478	12
3803227-2	LEA0478	12
3803260	LEA0478	12
3803904	LES0280	29
3840888	LES0280	29
3850764-4	LES0249	32
3850927-9	LEA0419	3
3853853-4	LEA0419	3
3854182-7	LEA0419	3
3854751-9	LES0249	32
3854809-5	LEA0419	3
3856004-1	LES0249	32
3856600	LEA0418	6
3856600-6	LEA0418	6
3857561	LEA0418	6
3857561-9	LEA0418	6
3857813	LEA0199	3
3860171	LEA0418	6
3860566	LES0249	32
3860764-4	LES0249	32
3885317	LES0249	32
820652	LEA0477	23
822454	LEA0477	23
827303	LEA0477	23
827349	LEA0477	23
834610	LEA0478	12
834965	LEA0478	12
841763	LEA0478	12
847651	LEA0477	23
849561	LEA0477	23
849602	LEA0477	23
861845	LES0280	29
872019-5	LEA0869	14
872019-5	LEA1206	13
872021	LEA0477	23
872022	LEA0477	23
872235	LEA0478	12
872926-1	LEA0478	12
872927	LEA0477	23
873633	LEA0869	14

873633	LEA1206	13
873770	LEA0869	14
873770	LEA1206	13
YANMAR		
119209-77010	LES0735	31
119256-77010	LES0735	31
119285-77010	LES0734	31
119385-77010	LES0735	31
119515-77010	LES0739	29
119620-77201	LEA0561	1
119620-77202	LEA0561	1
119631-77010	LES0740	29
119631-77011	LES0740	29
119717-77010	LES0739	29
119773-77200	LEA0248	10
121120-77012	LES0735	31
121254-77011	LES0113	34
121254-77012	LES0113	34
121254-77019	LES0113	34
121256-77010	LES0113	34
124450-77010	LES0735	31
124520-77010	LES0735	31
124520-77011	LES0735	31
124772-77010	LES0735	31
124976-77011	LES0735	31
129129-77010	LES0735	31
129130-77010	LES0113	34
129136-77010	LES0113	34
129136-77011	LES0113	34
129400-77010	LES0113	34
129400-77011	LES0113	34
129400-77012	LES0113	34
129407-77010	LES0735	31
129429-77010	LES0735	31
129429-77011	LES0735	31
129573-77010	LES0735	31
129608-77010	LES0072	30
129698-77010	LES0072	30
129900-77010	LES0195	34
129900-77040	LES0195	34

LucasElektrik

A Global Export Company



Our OE & OES References



Türk Traktör
CNH Turkey
CNH Tractors



Universal Tractors



Multipurpose
Engines (Lombardini)



Steyr & Perkins Based
Tractors



Cummins Engines
Deutz Engines



Cummins Engines
Buses



Air C. Systems
Commercial
Vehicle
Applications



Massey Ferguson
Agricultural
Tractors



Tractor Engines



Agricultural
Tractors Machinery
and Equipments



LCV and Buses



Perkins Engines



OES WORLDWIDE



Diesel Engines



Trucks, Pick-ups,
Minibuses, Trailer
Tractors



Perkins Engine
Agricultural
Tractors



Diesel Engines
United Kingdom



Cummins Engines



Diesel Engines
SERBIA



Passenger Cars &
Light Commercial
Vehicles

FACTORY

Lucas Elektrik A.Ş.

1. OSB 3 Nolu Yol No3 54580

Arifiye - Sakarya - Türkiye

Phone: +90 264 276 87 50

E-mail: marketing@lucaselektrik.com

Web: www.lucaselektrik.com

Previously Supplied



EUROPEAN DISTRIBUTION CENTER

LE Europe B.V.

Impact 39, 6921RZ Duiven

Netherlands

Phone: +31 6 25 04 11 57

E-mail: es@leeuropebv.com

Web: www.leeuropebv.com